BookletChart™

Chesapeake and Delaware Canal

(NOAA Chart 12277)

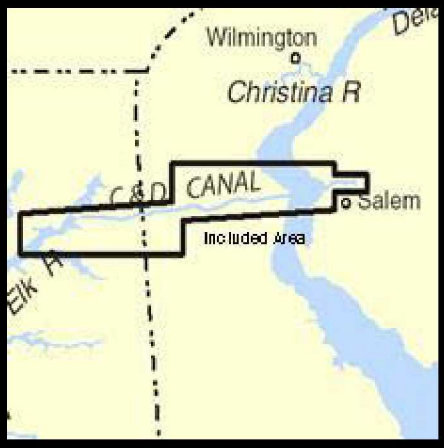

A reduced scale NOAA nautical chart for small boaters. When possible, use the full size NOAA chart for navigation.

- ☑ *Complete, reduced scale nautical chart*
- ☑ *Print at home for free*
- ☑ *Convenient size*
- ☑ *Up to date with all Notices to Mariners*
- ☑ *United States Coast Pilot excerpts*
- ☑ *Compiled by NOAA, the nation's chartmaker.*

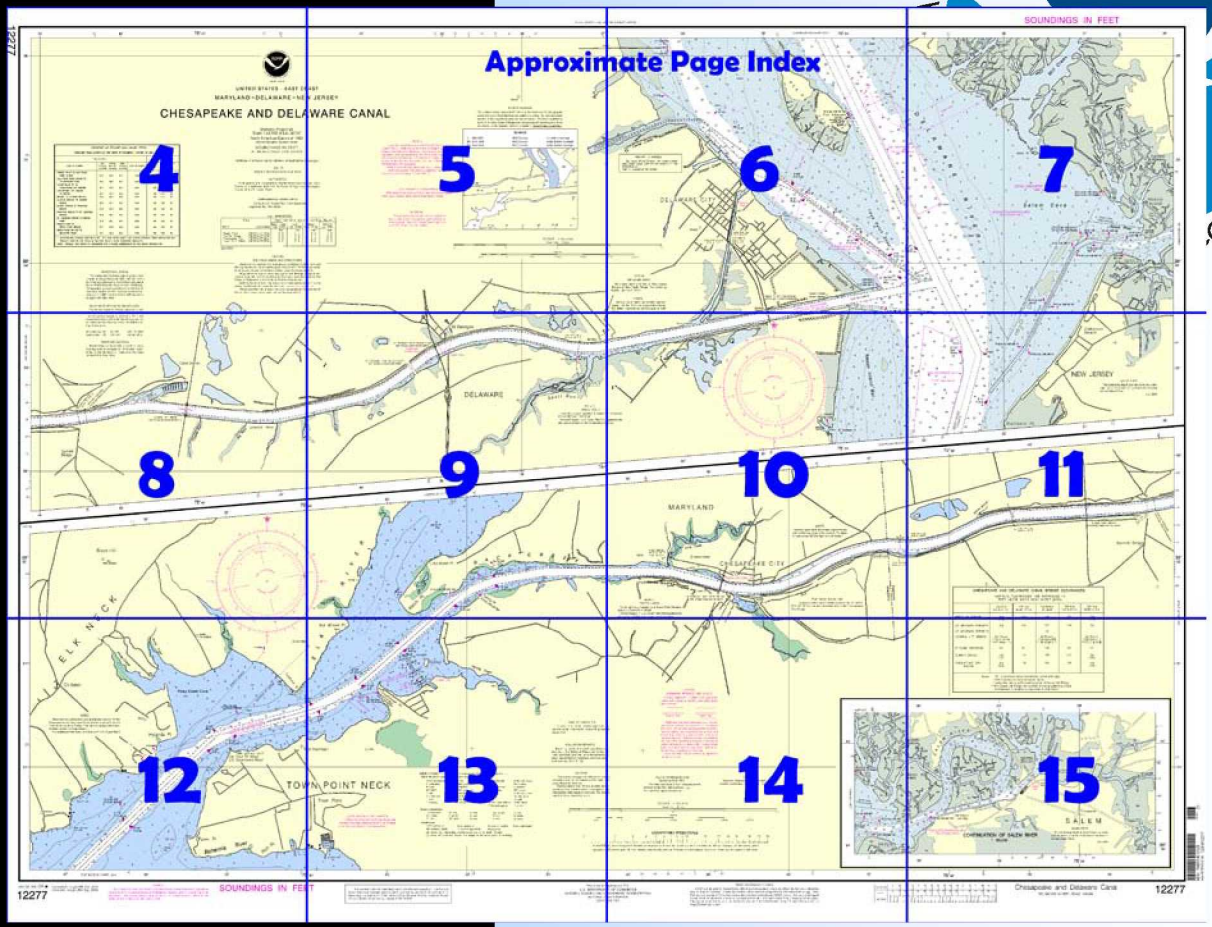

Home Edition (not for sale)

Published by the
National Oceanic and Atmospheric Administration
National Ocean Service
Office of Coast Survey
www.NauticalCharts.NOAA.gov
301-713-2770

What are Nautical Charts?

Nautical charts are a fundamental tool of marine navigation. They show water depths, obstructions, buoys, other aids to navigation, and much more. The information is shown in a way that promotes safe and efficient navigation. Chart carriage is mandatory on the commercial ships that carry America's commerce. They are also used on every Navy and Coast Guard ship, fishing and passenger vessels, and are widely carried by recreational boaters.

What is a BookletChart™?

This BookletChart is made to help recreational boaters locate themselves on the water. It has been reduced in scale for convenience, but otherwise contains all the information of the full-scale nautical chart. The bar scales have also been reduced, and are accurate when used to measure distances in this BookletChart. See the Note at the bottom of page 5 for the reduction in scale applied to this chart.

Whenever possible, use the official, full scale NOAA nautical chart for navigation. Nautical chart sales agents are listed on the Internet at http://www.NauticalCharts.NOAA.gov.

This BookletChart does NOT fulfill chart carriage requirements for regulated commercial vessels under Titles 33 and 44 of the Code of Federal Regulations.

Notice to Mariners Correction Status

This BookletChart has been updated for chart corrections published in the U.S. Coast Guard Local Notice to Mariners, the National Geospatial Intelligence Agency Weekly Notice to Mariners, and, where applicable, the Canadian Coast Guard Notice to Mariners. Additional chart corrections have been made by NOAA in advance of their publication in a Notice to Mariners. The last Notices to Mariners applied to this chart are listed in the Note at the bottom of page 7. Coast Pilot excerpts are not being corrected.



[Coast Pilot 3, Chapter 7 excerpts]

(1) **Chesapeake and Delaware Canal** is a sea-level waterway that extends from Delaware River at Reedy Point, Del., to **Back Creek** at Chesapeake City, Md., thence down Back Creek to Elk River and Chesapeake Bay. The Reedy Point entrance is 51 miles above the Delaware Capes, 35.5 miles below Philadelphia, 62 miles from Baltimore, and 187.5 miles from the Virginia Capes. **Miles** in the following text are the distances in nautical miles along the canal from the middle of Delaware River. **Reedy Point**, at Mile 0.7 on the north side of the Delaware entrance, is jettied and is marked by a light; the jetty on the south side is similarly marked.

(2) **Note**.–The system of marking the channel with buoys and lights is from each entrance and reverses at Chesapeake City. Even numbers and flashing red lights are on the north side and odd numbers and flashing green lights are on the south side between the Delaware Bay entrance and Chesapeake City. Even numbers and flashing red lights are on the south side and odd numbers and flashing green lights are on the north side from Chesapeake City to the west end of the canal. Each bend along the canal is marked by an amber light.

(3) In addition to the navigational aids, the north and south banks of the Chesapeake and Delaware Canal are lighted by mercury vapor luminaries spaced 500 feet apart on poles at a height of 25 feet mean high water. They are designed to illuminate the banks at the waters edge to assist ships navigating the canal at night. The poles are 250 feet apart with a light on every other pole (maintained by Corps of Engineers, U.S. Army).

(7) (b) *Speed*. No vessel in the waterway shall be raced or crowded alongside another vessel. Vessels of all types, including pleasure craft, are required to travel at all times at a safe speed throughout the canal and its approaches so as to avoid damage by suction or wave wash to wharves, landings, riprap protection, or other boats, or injury to persons. Pilots and vessel operators transiting the canal and its approaches are warned that violation of this rule may result in having their privilege to transit the canal suspended. Passages of vessels through the canal will be monitored and specific cases will be investigated where damage by suction or wave wash does occur. Owners and operators of yachts, motorboats, rowboats, and other craft are cautioned that large deep-draft ocean-going vessels and other large commercial vessels ply the canal, and such owners and operators should be particularly careful to moor or anchor well away from the main ship channels, with moorings and lines which are sufficient and proper.

(8) (c) *Right-of-way*. All vessels proceeding with the current shall have the right-of-way over those proceeding against the current. Large vessels or tows must not overtake and attempt to pass other large vessels or tows in the waterway. All small pleasure craft shall relinquish the right-of-way to deeper draft vessels, which have a limited maneuvering ability due to their draft and size.

(9) (d) *Stopping in waterway*. Vessels will not be permitted to stop or anchor in the ship channel.

(10) (e) *Water skiing*. Water skiing in the waterway is prohibited between Reedy Point and Welch Point.

(11) (f) *Sailboats*. Transiting the canal by vessels under sail is not permitted between Reedy Point and Welch Point.

§ 207.100 Inland waterway from Delaware River to Chesapeake Bay, Del. and Md. (Chesapeake and Delaware Canal); use, administration, and navigation.

(14) (c) *Safe navigation required*. Clearance for any vessel to enter or pass through any part of the waterway will be contingent on the vessel's having adequate personnel, machinery, and operative devices for safe navigation. In the event of question as to the ability of any vessel to navigate the waterway safely, a ruling will be made by the dispatcher. The owner, agent, master, pilot, or other person in charge of the vessel concerned may appeal the dispatcher's ruling to the District Engineer whose decision shall be final. A clearance by the dispatcher for a vessel's passage through the waterway shall not relieve the owners, agents, and operators of the vessel of full responsibility for its safe passage.

(16) (e) *Anchorage and wharfage facilities*. The anchorage basin at Chesapeake City and free wharfage facilities on the west side of the anchorage basin are available for small vessels only. These facilities are of limited capacity, and permission to occupy them for periods exceeding 24 hours must be obtained in advance from the dispatcher at Chesapeake City.

(22) (j) *Traffic lights*. Traffic lights are located at Reedy Point and Old Town Point Wharf. These traffic lights are described in the rules governing traffic through the waterway issued by the District Engineer.

(25) (m) *Refuse and oil*. The depositing of trash, refuse, debris, oil, or other material in the waterway or upon the banks or right-of-way is prohibited. Violators are subject to penalties as prescribed by Federal law.

Table of Selected Chart Notes

Corrected through NM Sep. 01/07
Corrected through LNM Aug. 28/07

HEIGHTS
Heights in feet above Mean High Water.

Mercator Projection
Scale 1:20,000 at Lat. 39°32'
North American Datum of 1983
(World Geodetic System 1984)
SOUNDINGS IN FEET
AT MEAN LOWER LOW WATER

LOCAL MAGNETIC DISTURBANCE
Differences of as much as 6° from the normal variation have been observed in Elk River Channel from Old Town Point to Courthouse Point.

LIGHTS
Mercury vapor lights are located approximately 140 feet from the edge of the channel. The lights in general are 500 feet apart on both banks.

LIGHTS
Mercury vapor lights are located approximately 140 feet from the edge of the channel. The lights in general are 500 feet apart on both banks.

AIDS TO NAVIGATION
Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

CAUTION
Improved channels shown by broken lines are subject to shoaling, particularly at the edges.

HORIZONTAL DATUM
The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 0.396" northward and 1.238" eastward to agree with this chart.

POLLUTION REPORTS
Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

CAUTION
Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

During some winter months or when endangered by ice, certain aids to navigation are replaced by other types or removed. For details see U.S. Coast Guard Light List.

CAUTION
SUBMARINE PIPELINES AND CABLES

Charted submarine pipelines and submarine cables and submarine pipeline and cable areas are shown as:

Pipeline Area *Cable Area*

Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging, or trawling.

Covered wells may be marked by lighted or unlighted buoys.

NOTE B
DELAWARE RIVER

The project depth is 40 feet in Reedy Island Range and New Castle Range. For controlling depths, use chart 12311.

RADAR REFLECTORS
Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

WARNING
The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

NOAA WEATHER RADIO BROADCASTS
The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Philadelphia, PA	KIH-28	162.475 MHz
Sudlersville, MD	WXK-97	162.50 MHz

PLANE COORDINATE GRID
(based on NAD 1927)

The Maryland State Grid is indicated on this chart at 10,000 foot intervals thus: $-\frac{1}{1}-$
The last three digits are omitted.

PRIVATE CHANNELS
Bulkhead Shoal Channel, the turning basin and Cedar Creek Channel are projects of Star Enterprise Co.
Aids to navigation are private.

SUPPLEMENTAL INFORMATION
Consult U.S. Coast Pilot 3 for important supplemental information.

SALEM RIVER
The controlling depth at mean lower low water was 12 feet for a width of 150 feet in the channel across Salem Cove.

Feb 2009

NOTE C
TRAFFIC LIGHTS

Traffic lights are in operation at Reedy Point Entrance and at Old Town Point Wharf.

Consult Chapter 7, U.S. Coast Pilot 3 for regulations for the control of traffic in the Canal before entering.

NOTE C
TRAFFIC LIGHTS

Traffic lights are in operation at Reedy Point Entrance and at Old Town Point Wharf.

Consult Chapter 7, U.S. Coast Pilot 3 for regulations for the control of traffic in the Canal before entering.

NOTE A
Navigation regulations are published in Chapter 2, U.S. Coast Pilot 3. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 5th Coast Guard District in Portsmouth, Virginia or at the Office of the District Engineer, Corps of Engineers in Philadelphia, Pennsylvania.

Refer to charted regulation section numbers.

Additional general instructions supplementing 207.100, may be found in Chapter 7, Coast Pilot 3.

NOTE D
Mariners are advised to use particular caution in the Chesapeake and Delaware Canal and its approach via Elk River as far south as Turkey Point due to strong wakes and washes caused by large vessels.

For additional information, see Chapter 7, U.S. Coast Pilot 3.

LOCAL MAGNETIC DISTURBANCE
Differences of as much as 2° to 5° from the normal variation have been observed along the Delaware River Channel.

Additional information can be obtained at nauticalcharts.noaa.gov.

SOURCE DIAGRAM
The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

CAUTION
FISH TRAP AREAS AND STRUCTURES

Mariners are warned that numerous uncharted duck blinds and fishing structures, some submerged, may exist in the fish trap areas. Such structures are not charted unless known to be permanent.

Regulations to assure clear passage to and through dredged and natural channels, and to established landings, are prescribed by the Corps of Engineers in the Code of Federal Regulations.

Definite limits of fish trap areas have been established in some areas, and those limits are shown thus: ——— — ——— —

Where definite limits have not been prescribed, the location of fishing structures is restricted only by the regulations.

AUTHORITIES
Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, and U.S. Coast Guard.

CAUTION
This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.

ABBREVIATIONS
(For complete list of Symbols and Abbreviations, see Chart No. 1.)

Aids to Navigation (lights are white unless otherwise indicated):

AERO aeronautical	G green	Mo morse code	R TR radio tower
Al alternating	IQ interrupted quick	N nun	Rot rotating
B black	Iso isophase	OBSC obscured	s seconds
Bn beacon	LT HO lighthouse	Oc occulting	SEC sector
C can	M nautical mile	Or orange	St M statute miles
DIA diaphone	m minutes	Q quick	VQ very quick
F fixed	MICRO TR microwave tower	R red	W white
Fl flashing	Mkr marker	Ra Ref radar reflector	WHIS whistle
		R Bn radiobeacon	Y yellow

Bottom characteristics:

Blds boulders	Co coral	gy gray	Oys oysters	so soft
bk broken	G gravel	h hard	Rk rock	Sh shells
Cy clay	Grs grass	M mud	S sand	sy sticky

Miscellaneous:

AUTH authorized	Obstn obstruction	PD position doubtful	Subm submerged
ED existence doubtful	PA position approximate	Rep reported	

(21) Wreck, rock, obstruction, or shoal swept clear to the depth indicated.
(2) Rocks that cover and uncover, with heights in feet above datum of soundings.

TIDAL INFORMATION

PLACE NAME	(LAT/LONG)	Height referred to datum of soundings (MLLW) Mean Higher High Water	Mean High Water	Mean Low Water
		feet	feet	feet
Reedy Point	(39°34'N/75°34'W)	5.8	5.5	0.2
Summit Bridge	(39°32'N/75°44'W)	3.8	3.6	0.1
Chesapeake City	(39°32'N/75°49'W)	3.3	3.1	0.2
Old Town Point Wharf	(39°30'N/75°55'W)	2.7	2.4	0.2

Dashes (- - -) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the Internet from http://tidesandcurrents.noaa.gov.
(Jul 2007)

CHESAPEAKE AND DELAWARE CANAL CHANNEL DEPTHS
TABULATED FROM SURVEYS BY THE CORPS OF ENGINEERS - REPORT OF APR 2009

* SEE FOOTNOTE					PROJECT DIMENSIONS		
NAME OF CHANNEL	LEFT OUTSIDE QUARTER	MIDDLE HALF OF CHANNEL	RIGHT OUTSIDE QUARTER	DATE OF SURVEY	WIDTH (FEET)	LENGTH * (MILES)	DEPTH * (FEET)
TURKEY POINT TO OLD TOWN POINT WHARF	35.4	35.0	33.1	4-09	400	5.45	35
OLD TOWN POINT WHARF TO BULL MINNOW POINT	33.5	35.0	35.6	10-08	400	1.63	35
BULL MINNOW POINT TO CHESAPEAKE CITY BRIDGE	27.8	32.0	24.5	5-08	400	3.69	35
CHESAPEAKE CITY BRIDGE TO BETHEL	30.3	32.3	29.4	5-08	400	1.51	35
BETHEL TO GUTHRIE BRANCH	28.5	30.1	30.7	5-08	400	1.13	35
GUTHRIE BRANCH TO SUMMIT BRIDGE	32.7	32.4	31.8	4-08	400	1.02	35
SUMMIT BRIDGE TO RAILROAD BRIDGE	34.6	33.8	30.4	4-08	400	1.65	35
RAILROAD BRIDGE TO ST. GEORGES BRIDGE	30.5	35.3	33.8	4-08	400	2.57	35
ST. GEORGES BRIDGE TO BIDDLE POINT	26.3	32.6	30.1	4-08	400	1.58	35
BIDDLE POINT TO REEDY POINT BRIDGE	31.8	35.0	33.4	4-08	400	1.68	35
REEDY POINT BRIDGE TO DELAWARE RIVER	28.8	32.5	30.9	4-08	400	1.63	35

* CONTROLLING CHANNEL DEPTHS IN FEET AT LOCAL MEAN LOWER LOW WATER ENTERING FROM CHESAPEAKE BAY.
PROJECT LENGTHS ARE GIVEN IN NAUTICAL MILES UNLESS OTHERWISE INDICATED.
NOTE - CONSULT THE CORPS OF ENGINEERS FOR CHANGES SUBSEQUENT TO THE ABOVE INFORMATION

PRINT-ON-DEMAND CHARTS
NOAA and its partner, OceanGrafix, offer this chart updated weekly by NOAA for Notices to Mariners and critical corrections. Charts are printed when ordered using Print-on-Demand technology. New Editions are available 5-8 weeks before their release as traditional NOAA charts. Ask your chart agent about Print-on-Demand charts or contact NOAA at 1-800-584-4683, http://NauticalCharts.gov, help@NauticalCharts.gov, or OceanGrafix at 1-877-56CHART, http://OceanGrafix.com, or help@OceanGrafix.com.

12277

44' 43' 75° 42' 41'

36'

THE NATION'S CHARTMAKER SINCE 1807

UNITED STATES - EAST COA

MARYLAND – DELAWARE – NEW

CHESAPEAKE AND DELA

Mercator Projection
Scale 1:20,000 at Lat. 39°32'
North American Datum of 1983
(World Geodetic System 1984)
SOUNDINGS IN FEET
AT MEAN LOWER LOW WATER

Addit onal information can be obtained at nauticalcharts.no

HEIGHTS
Heights in fee: above Mean High Water.

AUTHORITIES
Hydrography and topography by the National Ocean Servic
Survey, with additional data from the Corps of Engineers Ge
Survey, and U.S. Coast Guard.

SUPPLEMENTAL INFORMATION
Consult U.S. Coast Pilot 3 for important supplemental information.

CHESAPEAKE AND DELAWARE CANAL CHANNEL DEPTHS
TABULATED FROM SURVEYS BY THE CORPS OF ENGINEERS - REPORT OF APR 2009

* SEE FOOTNOTE					PROJECT DIMENSIONS		
NAME OF CHANNEL	LEFT OUTSIDE QUARTER	MIDDLE HALF OF CHANNEL	RIGHT OUTSIDE QUARTER	DATE OF SURVEY	WIDTH (FEET)	LENGTH * (MILES)	DEPTH * (FEET)
TURKEY POINT TO OLD TOWN POINT WHARF	35.4	35.0	33.1	4-08	400	5.45	35
OLD TOWN POINT WHARF TO BULL MINNOW POINT	33.5	35.0	35.6	10-08	400	1.63	35
BULL MINNOW POINT TO CHESAPEAKE CITY BRIDGE	27.8	32.0	24.5	5-08	400	3.69	35
CHESAPEAKE CITY BRIDGE TO BETHEL	30.3	32.3	29.4	5-08	400	1.51	35
BETHEL TO GUTHRIE BRANCH	28.5	30.1	30.7	5-08	400	1.13	35
GUTHRIE BRANCH TO SUMMIT BRIDGE	32.7	32.4	31.8	4-08	400	1.02	35
SUMMIT BRIDGE TO RAILROAD BRIDGE	34.6	33.8	30.4	4-08	400	1.65	35
RAILROAD BRIDGE TO ST. GEORGES BRIDGE	30.5	35.3	33.8	4-08	400	2.57	35
ST. GEORGES BRIDGE TO BIDDLE POINT	26.3	32.6	30.1	4-08	400	1.58	35
BIDDLE POINT TO REEDY POINT BRIDGE	31.8	35.0	33.4	4-08	400	1.68	35
REEDY POINT BRIDGE TO DELAWARE RIVER	28.8	32.5	30.9	4-08	400	1.63	35

* CONTROLLING CHANNEL DEPTHS IN FEET AT LOCAL MEAN LOWER LOW WATER ENTERING FROM CHESAPEAKE BAY. PROJECT LENGTHS ARE GIVEN IN NAUTICAL MILES UNLESS OTHERWISE INDICATED.
NOTE - CONSULT THE CORPS OF ENGINEERS FOR CHANGES SUBSEQUENT TO THE ABOVE INFORMATION

TIDAL INFORMATION

PLACE		Height referred to datu	
NAME	(LAT/LONG)	Mean H ghor High Water	Me High
		feet	fe
Reedy Point	(39°34'N/75°34'W)	5.8	5.
Summit Bridge	(39°32'N/75°44'W)	3.8	3.
Chesapeake City	(39°32'N/75°49'W)	3.3	3.
Old Town Point Wharf	(39°30'N/75°55'W)	2.7	2.

Dashes (- - -) located in datum columns ndicate unavailable datum values for a tide station. tide predictions, and tidal current predictions are available on the Internet from http://tidesan

(Jul 2007)

CAUTION
FISH TRAP AREAS AND STRUCTURES

Mariners are warned that numerous uncharted duck bli fishing structures, some submerged, may exist in the fish tra Such structures are not charted unless known to be permane

Regulations to assure clear passage to and through dred natural channels, and to established landings, are prescribe Corps of Engineers in the Code of Federal Regulations.

Definite limits of fish trap areas have been established areas, and those limits are shown thus: — — —

Where definite limits have not been prescribed, the loc fishing structures is restricted only by the regulations.

HORIZONTAL DATUM

The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for chart ng purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 0.396" northward and 1.238" eastward to agree with this chart.

NOAA WEATHER RADIO BROADCASTS

The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Philadelphia, PA	KIH-28	162.475 MHz
Sudlersville MD	WXK-97	162.50 MHz

RADAR REFLECTORS

Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

840
35'
39° 34'
630
JOINS PANEL BELOW
33'

Joins page 8

4

North

Printed at reduced scale. ~~SCALE 1:20,000~~ See Note on page 5.

Nautical Miles
0 1 1½

Yards
500 0 500 1000 1500 2000 2500

40' 39' 38' 37'

AST
W JERSEY

WARE CANAL

Trestle
TANK
STACK
Log Boom
Tanks
Tank
RIVER WATER INT

SOURCE DIAGRAM

The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

SOURCE		
A 1990-2001	NOS Surveys	full bottom coverage
B2 1970-1989	NOS Surveys	partial bottom coverage
B4 1900-1939	NOS Surveys	partial bottom coverage

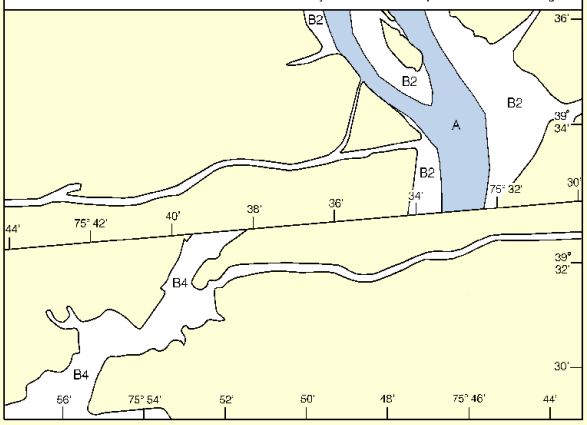

NOTE A

Navigation regulations are published in Chapter 2, U.S. Coast Pilot 3. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 5th Coast Guard District in Portsmouth, Virginia or at the Office of the District Engineer, Corps of Engineers in Philadelphia, Pennsylvania.

Refer to charted regulation section numbers.

Additional general instructions supplementing 207.100, may be found in Chapter 7, Coast Pilot 3.

LOCAL MAGNETIC DISTURBANCE

Differences of as much as 2° to 5° from the normal variation have been observed along the Delaware River Channel.

WARNING

The prudent mariner will not re y solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

atum of soundings (MLLW)	
Mean gh Water	Mean Low Water
feet	foot
5.5	0.2
3.6	0.1
3.1	0.2
2.4	0.2

on. Real-time water levels, sandcurrents.noaa.gov.

noaa.gov.

vice, Coast Geological

olinds and trap areas. nent. edged and bed by the

d in some

ocation of

SCALE 1:20,000

Nautical Miles

½ 0 ½ 1

Yards

500 0 500 1000 1500 200

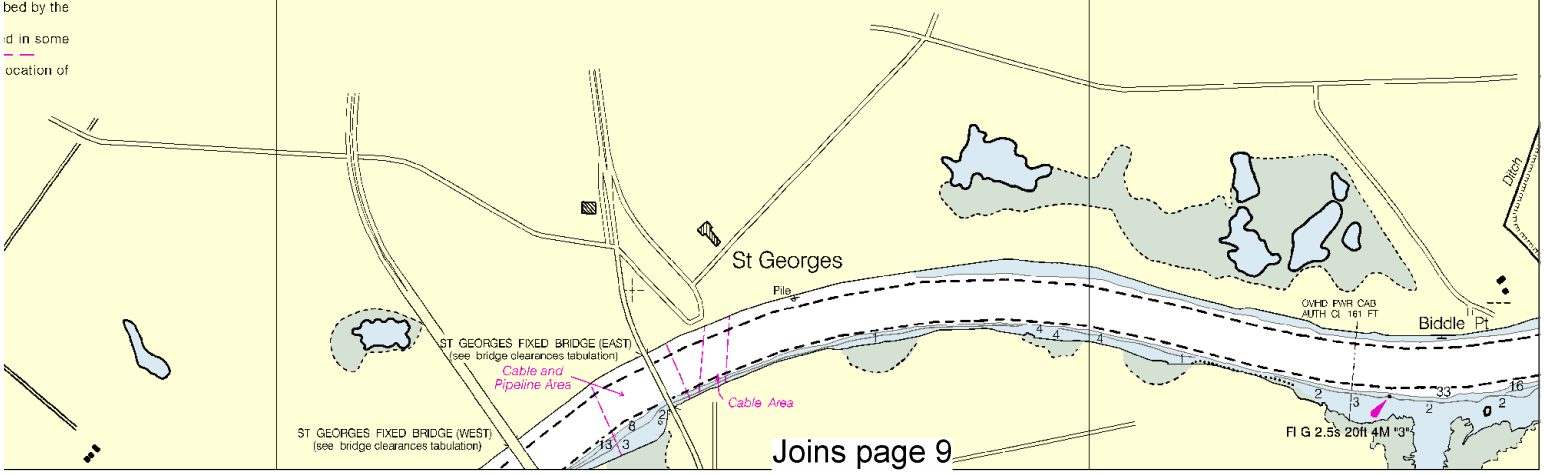

Joins page 6

Joins page 9

May 1938 G-1938-477 KAPP 631

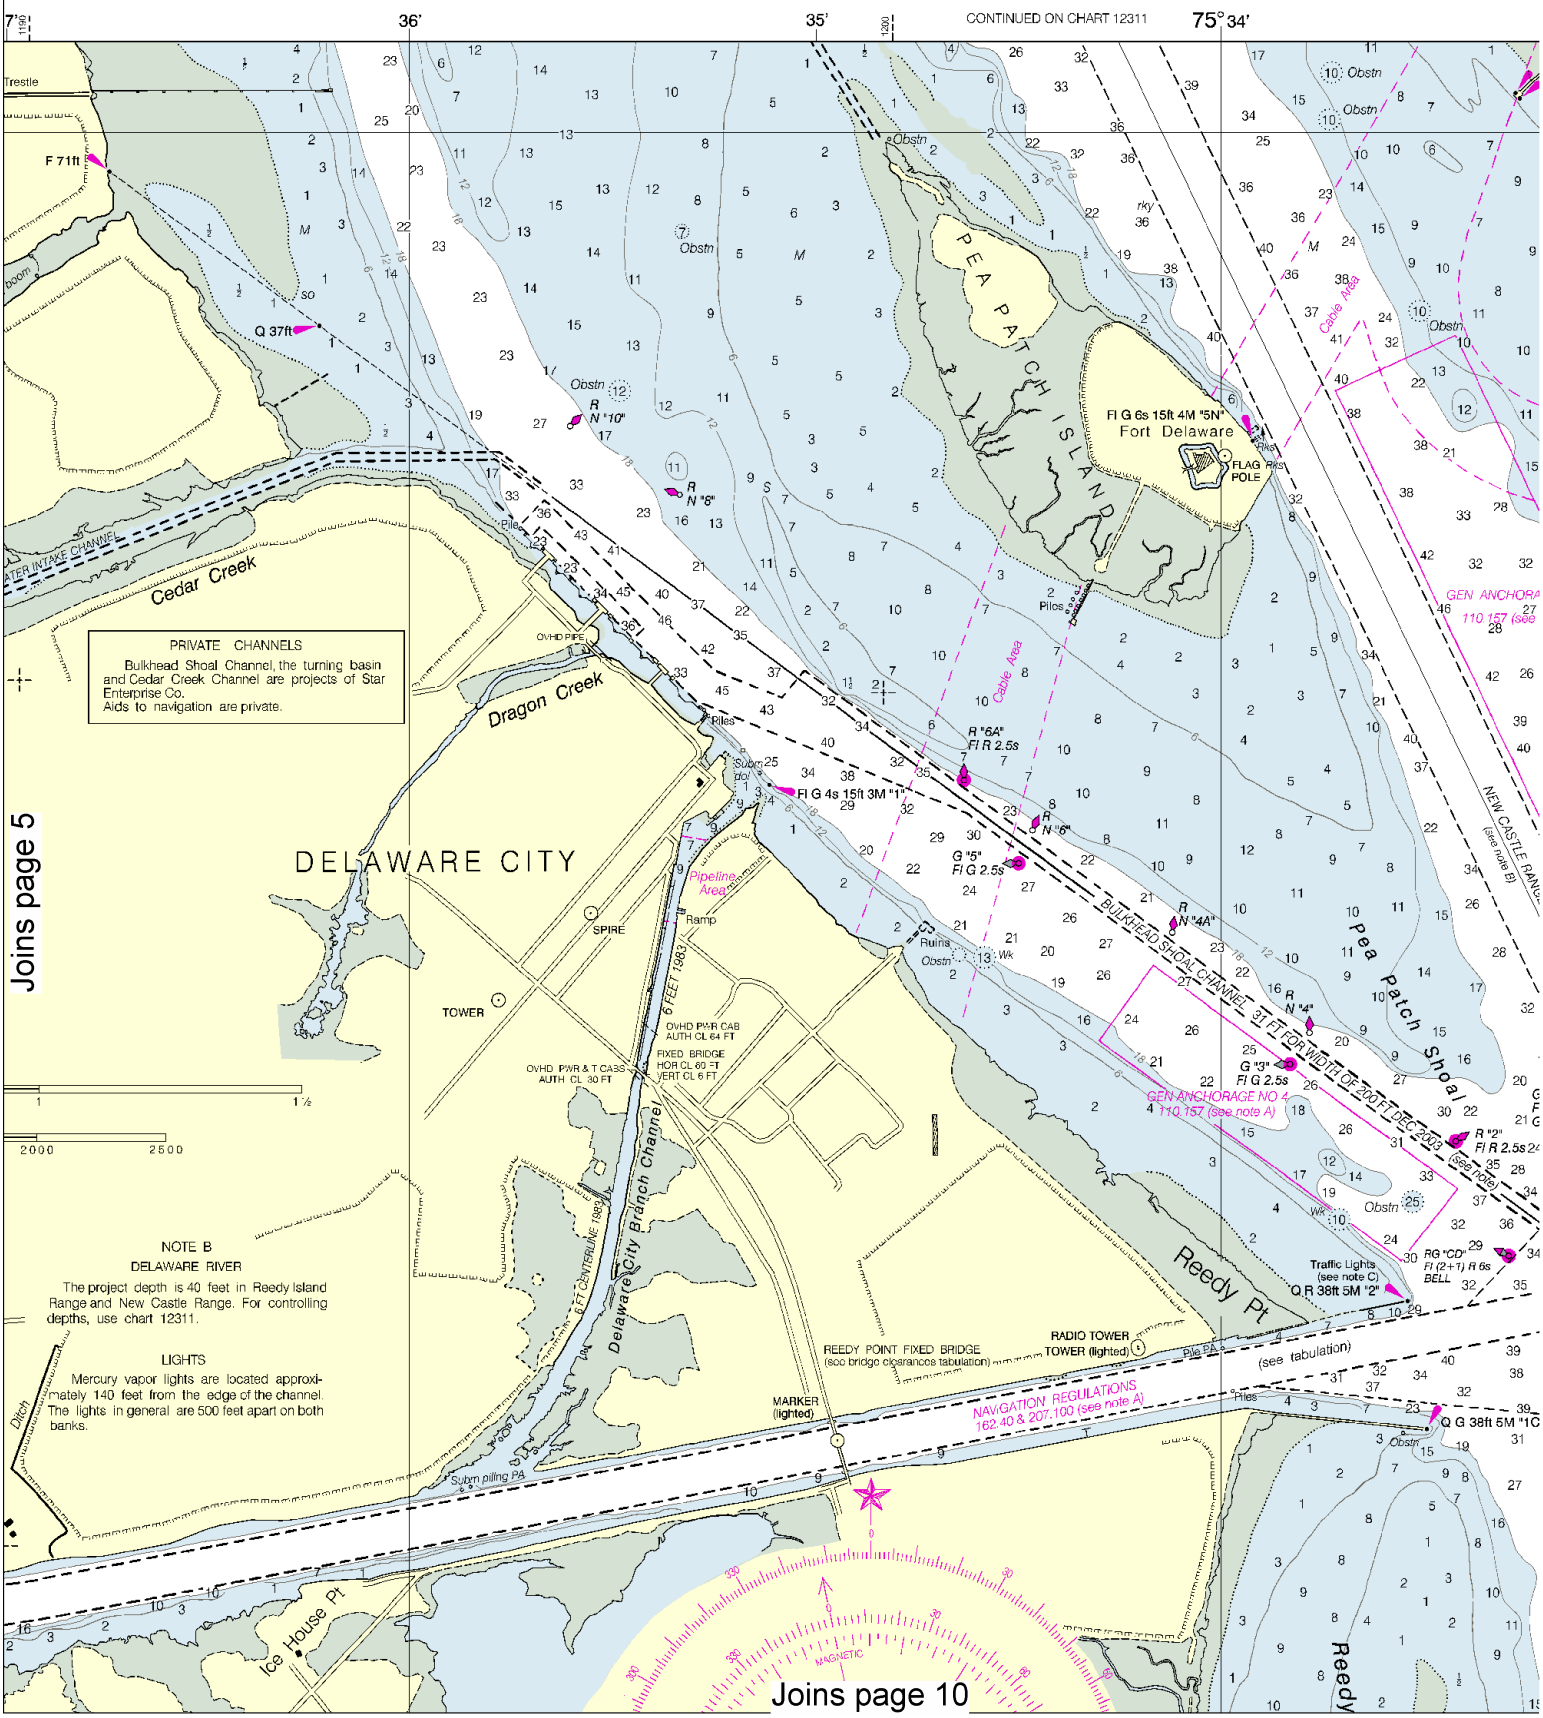

North

Printed at reduced scale. ~~SCALE 1:20,000~~ See Note on page 5.

Nautical Miles: 0 — 1 — 1 ½

Yards: 500 — 0 — 500 — 1000 — 1500 — 2000 — 2500

SOUNDINGS IN FEET

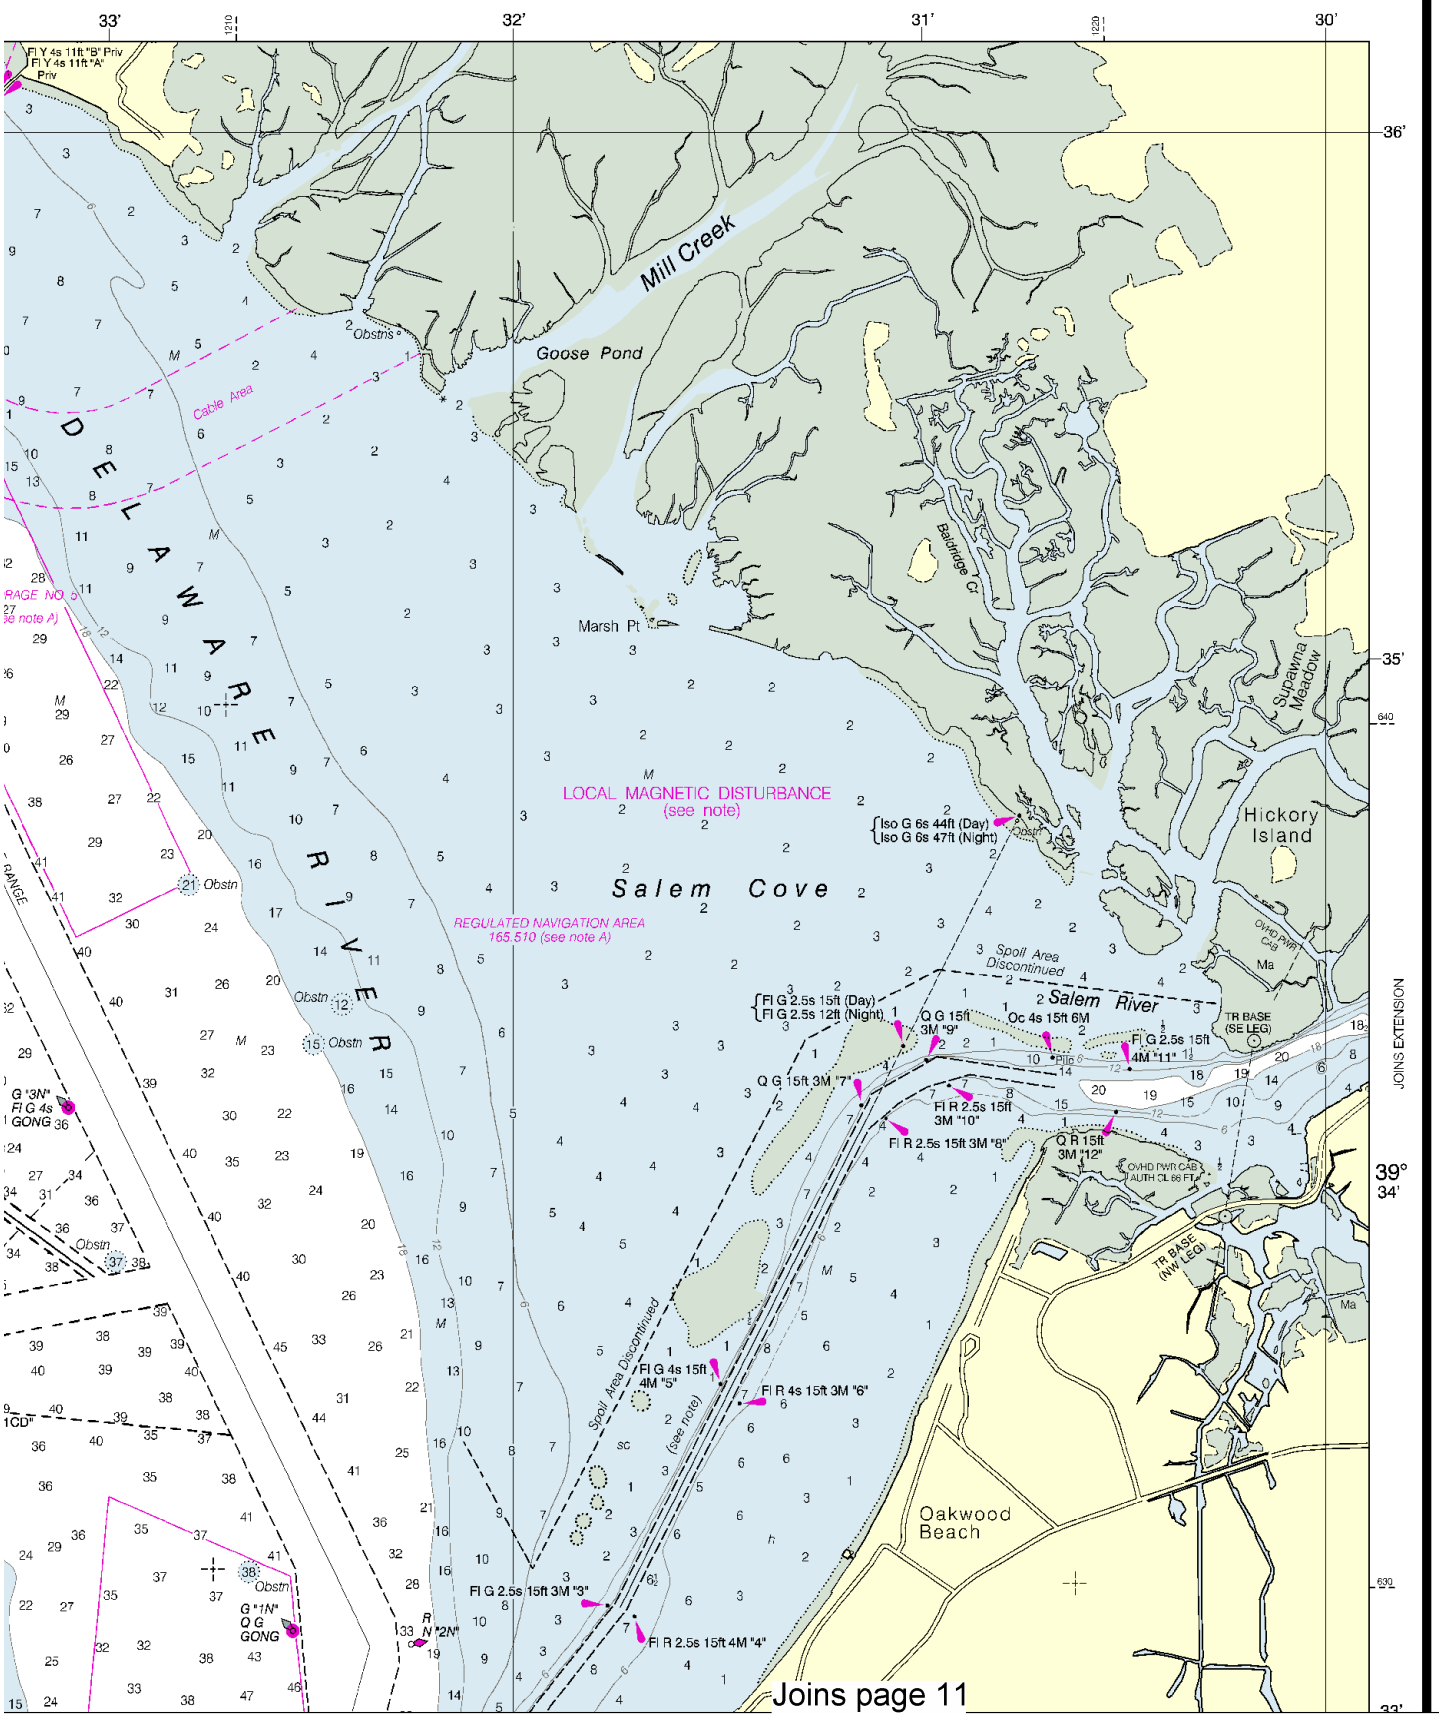

This BookletChart has been updated with: Coast Guard Local Notice To Mariners: 0810 2/23/2010,
NGA Weekly Notice to Mariners: 1010 3/6/2010,
Canadian Coast Guard Notice to Mariners: n/a .

Joins page 4

Geographic positions refe
American Datum of 1927 m
average of 0.396" northward and 1.238" eastward
to agree with this chart.

NOAA WEATHER RADIO BROADCASTS

The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Philadelphia, PA	KIH-28	162.475 MHz
Sudlersville MD	WXK-97	162.50 MHz

RADAR REFLECTORS

Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

areas, and those limits are shown thus:
Where definite limits have not been prescribed, the loc
fishing structures is restricted only by the regulations.

JOINS PANEL BELOW

Canal Station

CHMD PWR CAB
AUTH CL 159 FT
PIPELINE CROSSING
(see bridge clearances tabulation)

Obstn

Piling PA

Cable Area

CONRAIL LIFT BRIDGE
(see bridge clearances tabulation)

Crystal Run

Joy Run

Lorewood Grove

Summit Bridge

33' 50" 40" 30" 20" 10" 32' 50" 620

44' 43' 75° 42' 41' 75° 54

KAPP 632

57' 56' 55'

Black Hill

311
FIRE TOWER

39° 32'

K NECK

BARN
(W GABLE)

Muddy

Joyes Creek

MAGNETIC

VAR 11°30'W (2007)

ANNUAL DECREASE 1°

Oc 4s 122ft (Day)
Oc 4s 119ft (Night)

Joins page 12

North

Printed at reduced scale. ~~SCALE 1:20,000~~ See Note on page 5.

Nautical Miles
0 1 1½

Yards
500 0 500 1000 1500 2000 2500

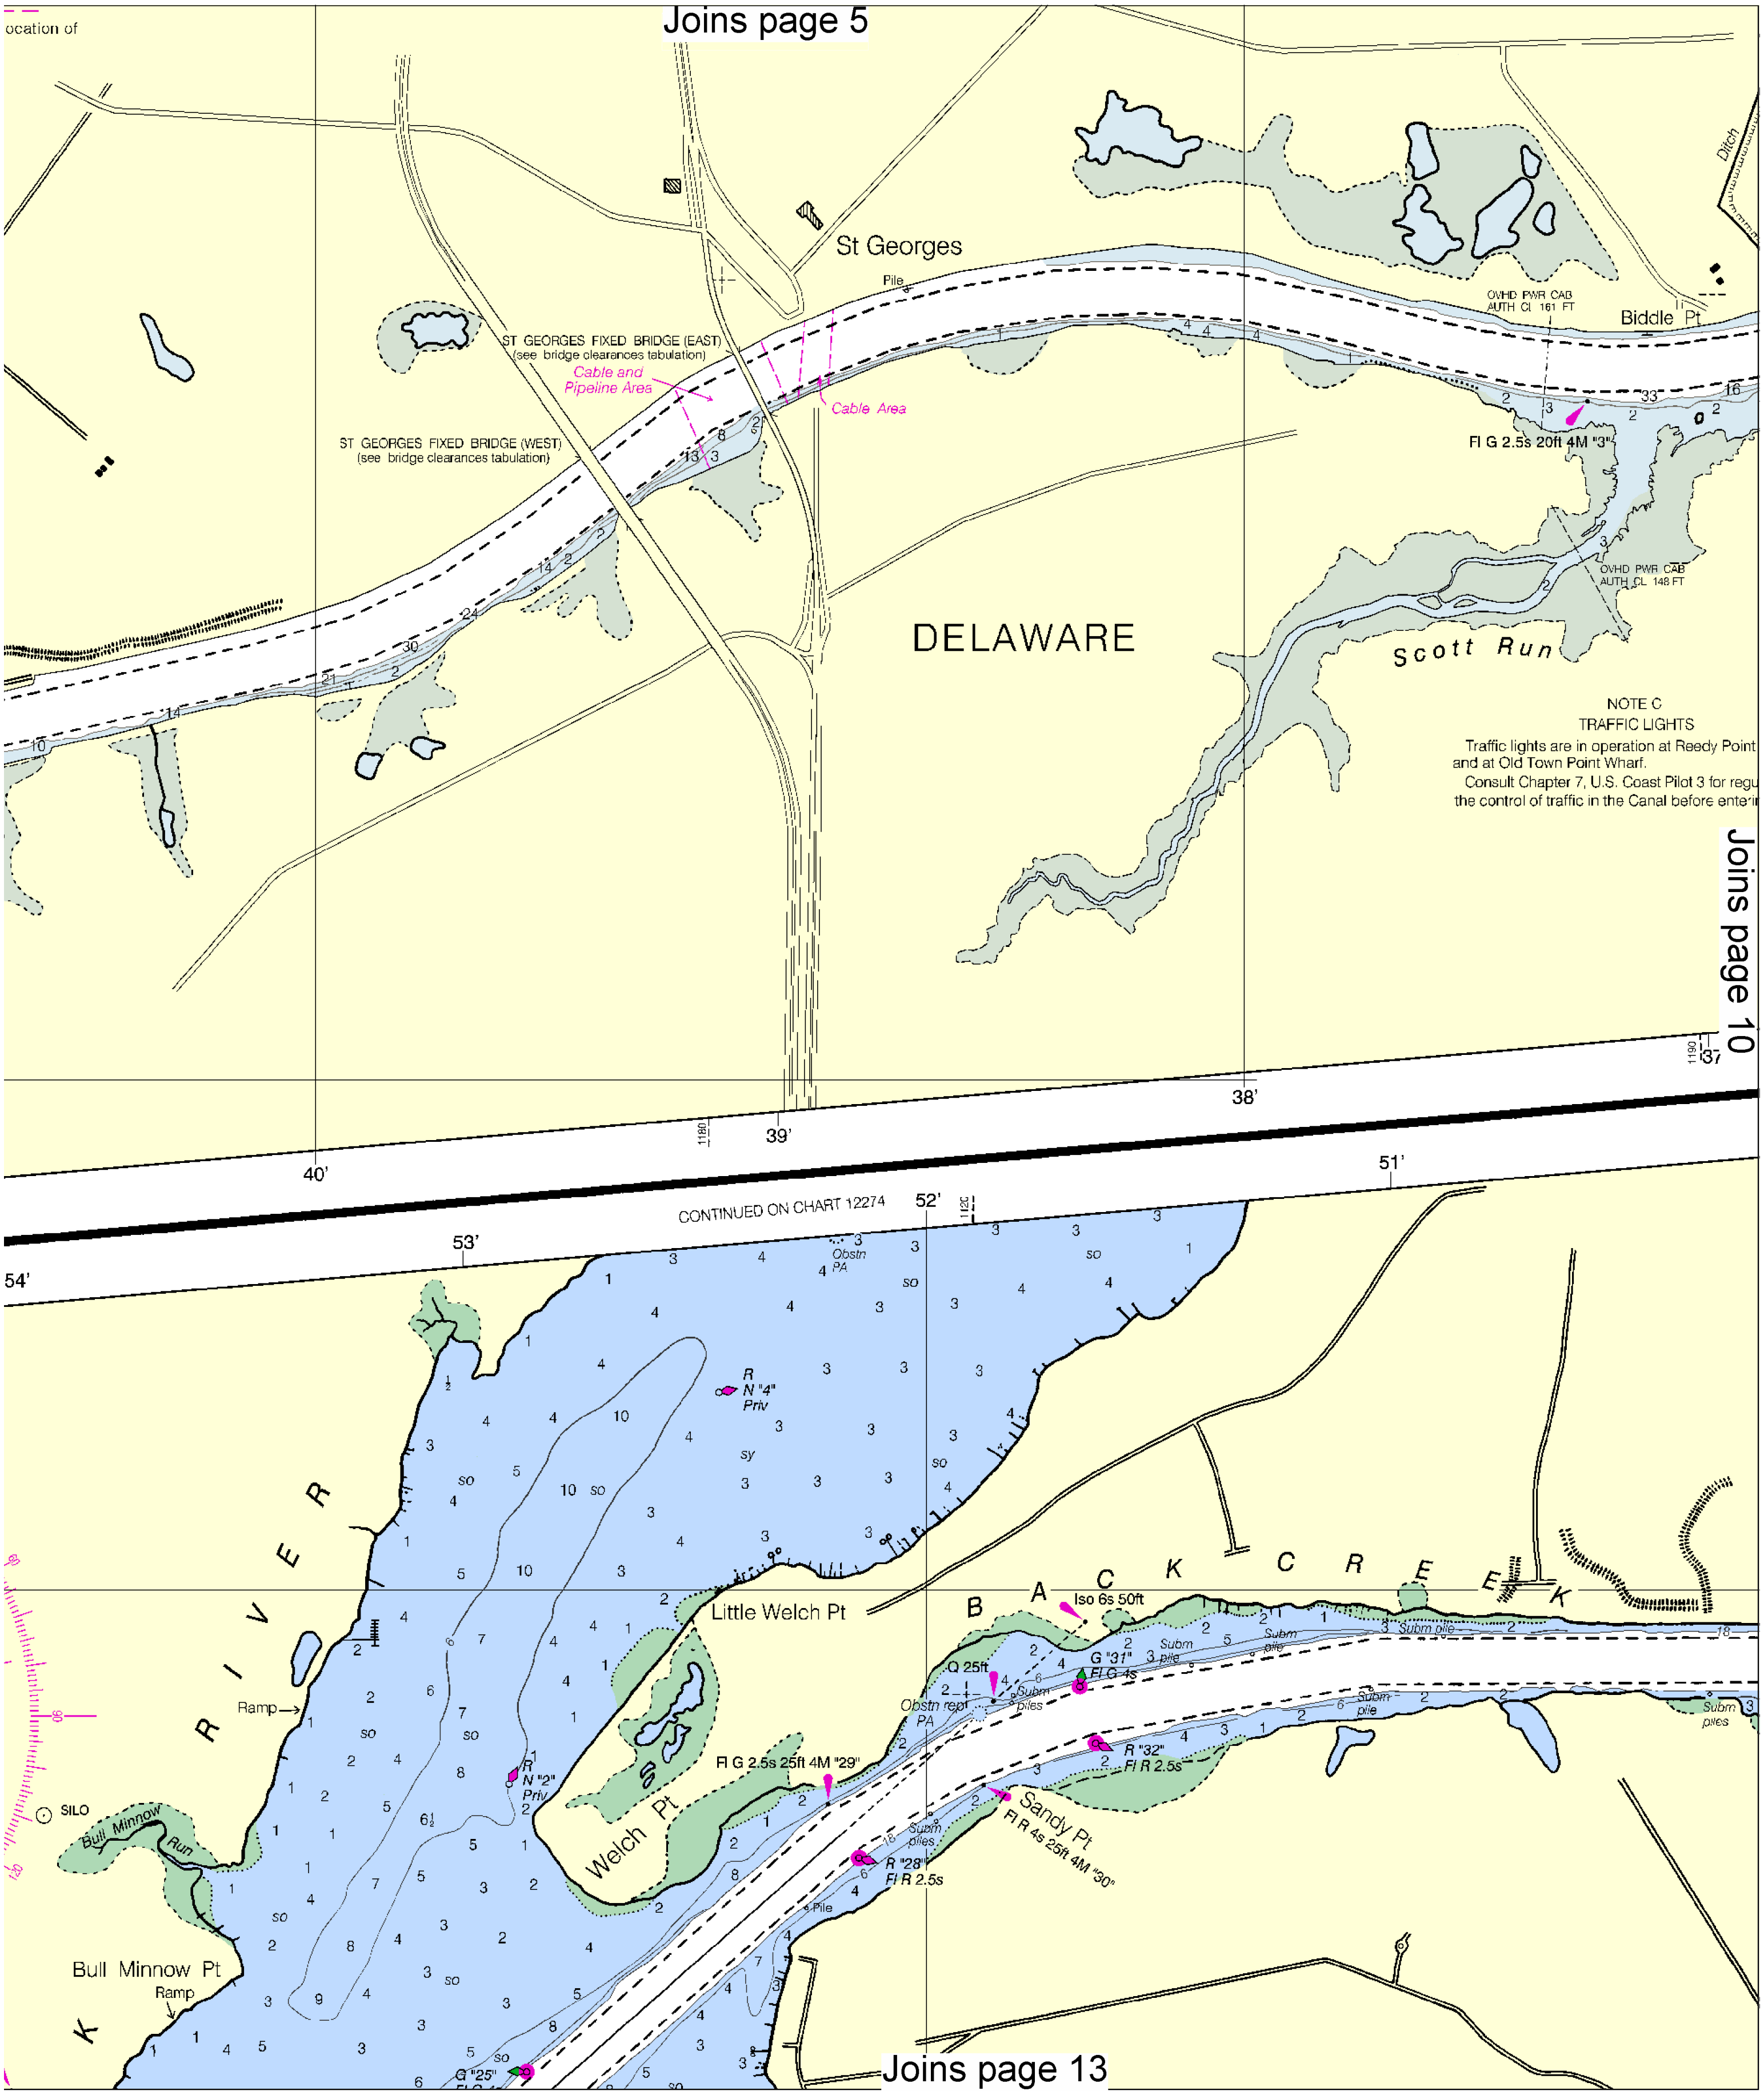

Joins page 5
St Georges
Pile
ST GEORGES FIXED BRIDGE (EAST)
(see bridge clearances tabulation)
Cable and
Pipeline Area
Cable Area
ST GEORGES FIXED BRIDGE (WEST)
(see bridge clearances tabulation)
OVHD PWR CAB
AUTH CL 161 FT
Biddle Pt
Fl G 2.5s 20ft 4M "3"
OVHD PWR CAB
AUTH CL 148 FT
DELAWARE
Scott Run
Ditch
NOTE C
TRAFFIC LIGHTS
Traffic lights are in operation at Reedy Point
and at Old Town Point Wharf.
Consult Chapter 7, U.S. Coast Pilot 3 for regu
the control of traffic in the Canal before enteri
Joins page 10
40'
39'
38'
37
CONTINUED ON CHART 12274
54'
53'
52'
51'
Obstn
PA
R
N "4"
Priv
R I V E R
K
Little Welch Pt
B A C K C R E E K
Iso 6s 50ft
Q 25ft
G "31"
Fl G 4s
Subm pile
Subm piles
Obstn rep
PA
R "32"
Fl R 2.5s
Fl G 2.5s 25ft 4M "29"
Sandy Pt
Fl R 4s 25ft 4M "30"
R "28"
Fl R 2.5s
Ramp
R
N "2"
Priv
Welch Pt
SILO
Bull Minnow Run
Bull Minnow Pt
Ramp
Pile
G "25"
Joins page 13

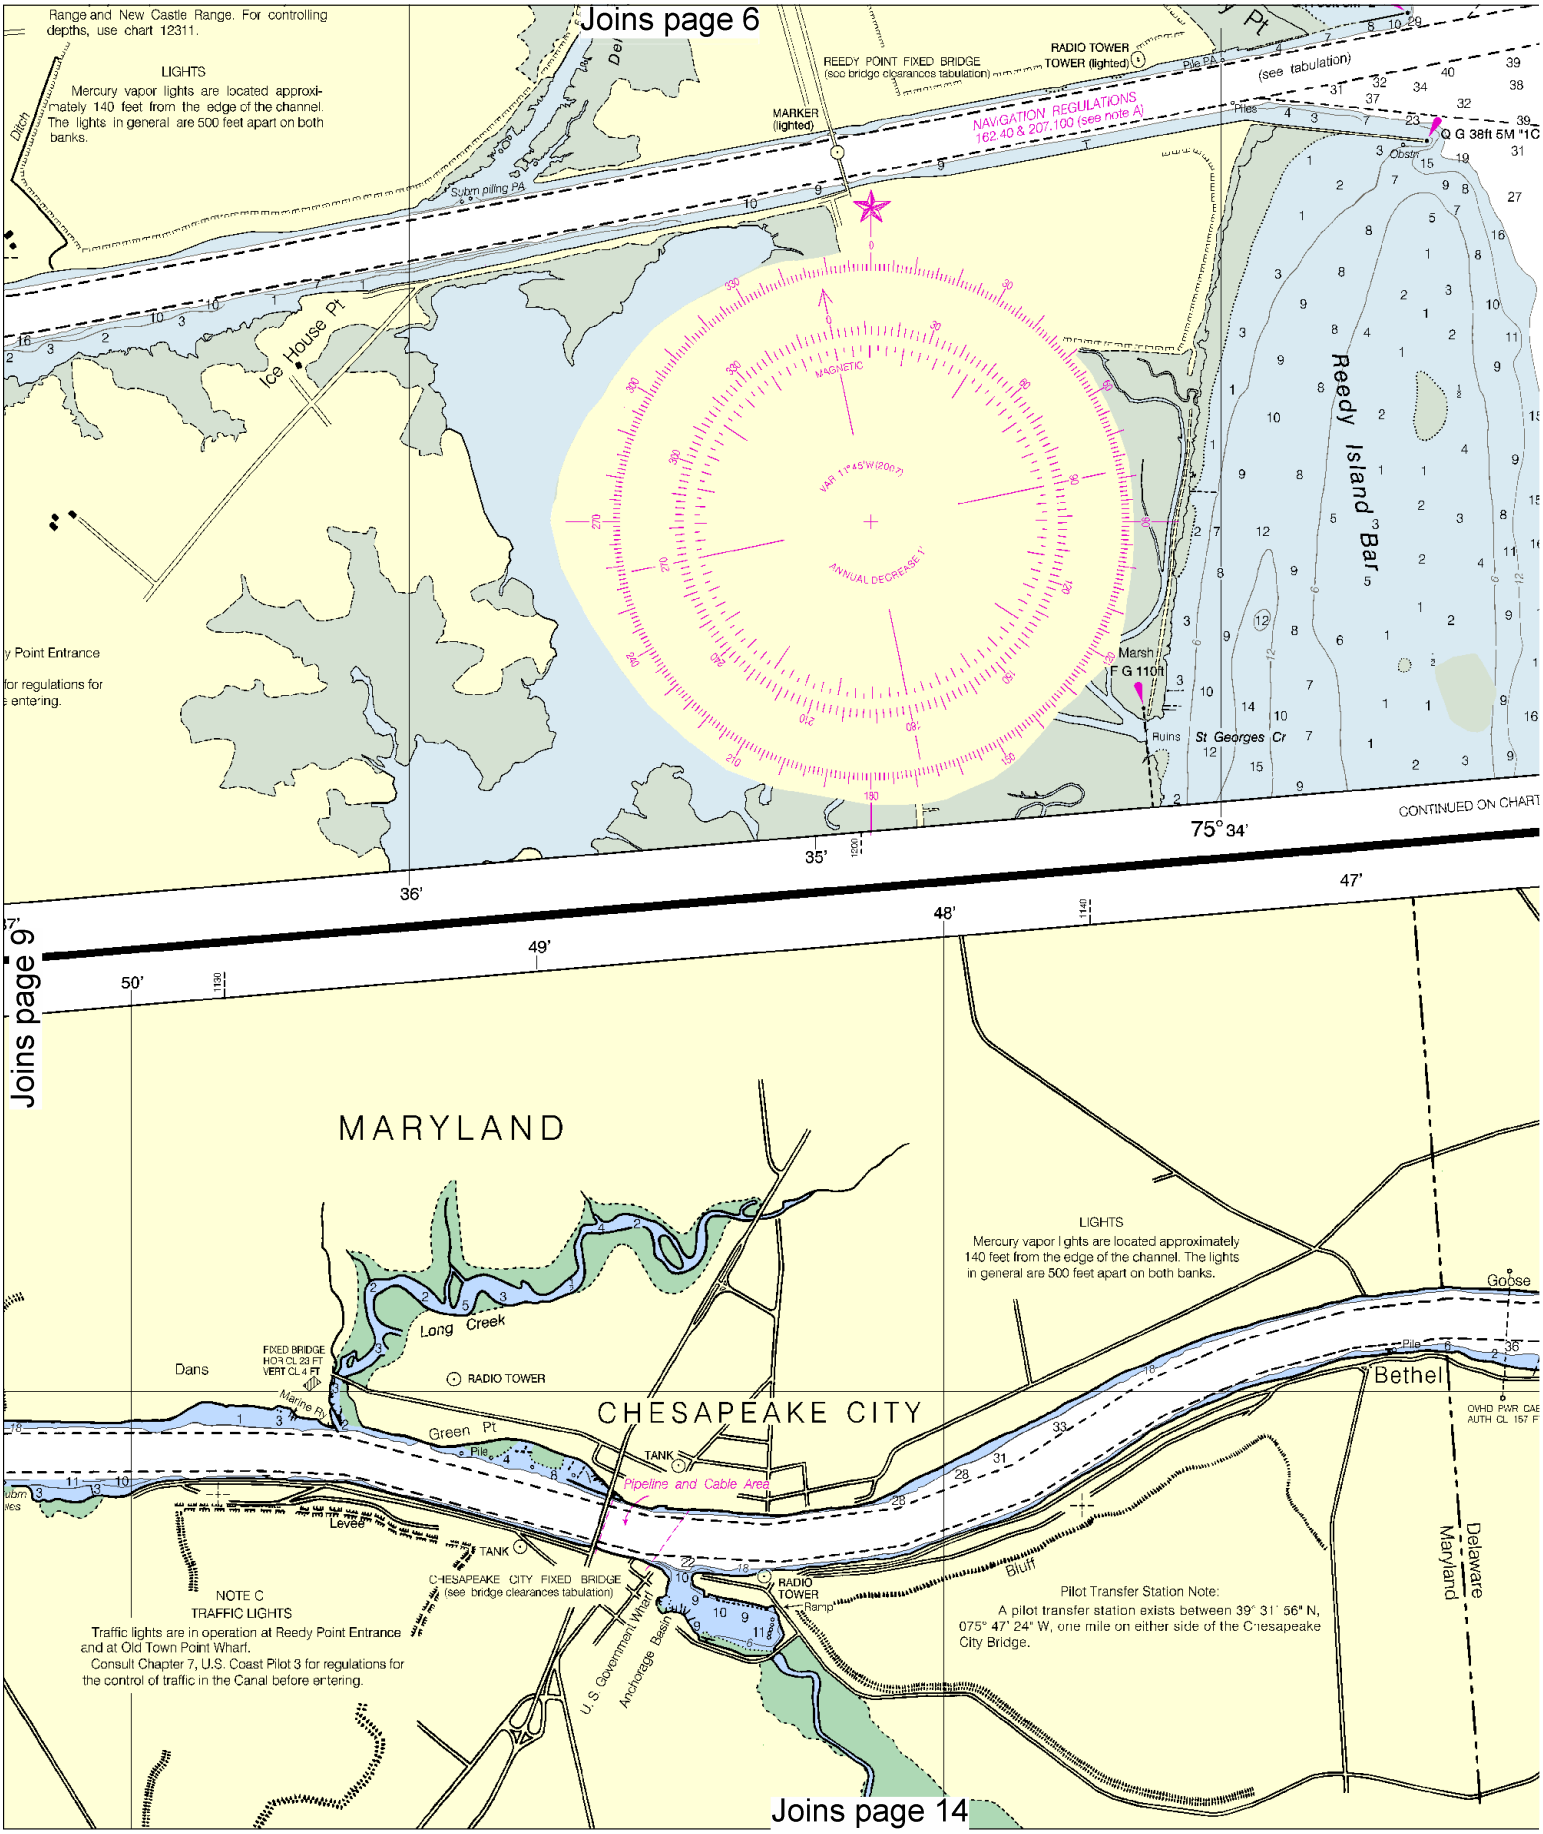

North

Printed at reduced scale. ~~SCALE 1:20,000~~ See Note on page 5.

Nautical Miles: 0 — 1 — 1½

Yards: 500 — 0 — 500 — 1000 — 1500 — 2000 — 2500

Joins page 7

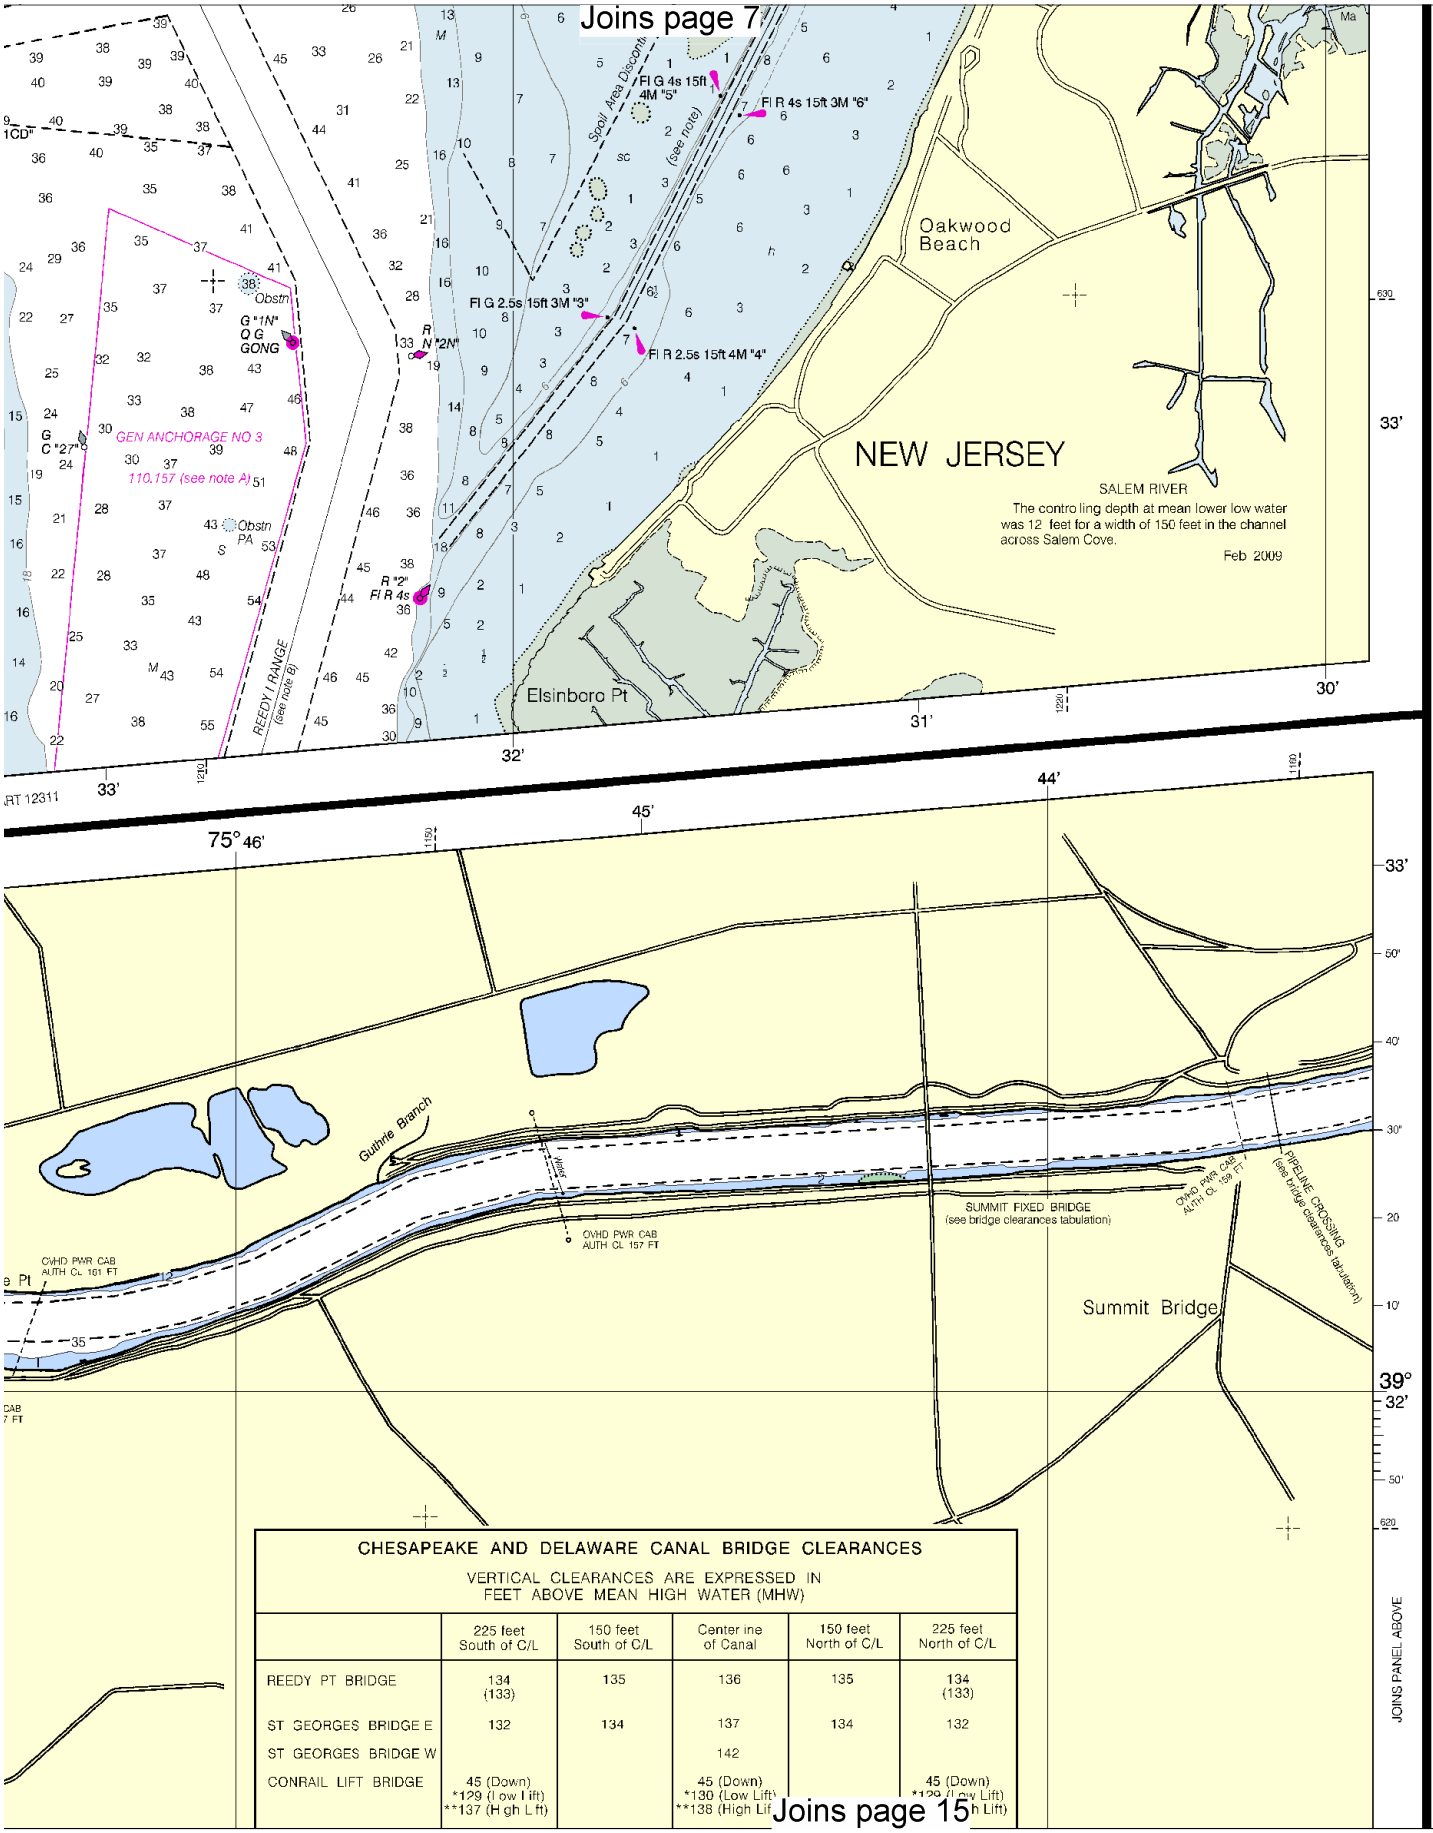

CHESAPEAKE AND DELAWARE CANAL BRIDGE CLEARANCES

VERTICAL CLEARANCES ARE EXPRESSED IN FEET ABOVE MEAN HIGH WATER (MHW)

	225 feet South of C/L	150 feet South of C/L	Center ine of Canal	150 feet North of C/L	225 feet North of C/L
REEDY PT BRIDGE	134 (133)	135	136	135	134 (133)
ST GEORGES BRIDGE E	132	134	137	134	132
ST GEORGES BRIDGE W			142		
CONRAIL LIFT BRIDGE	45 (Down) *129 (I ow l ift) **137 (H gh L ft)		45 (Down) *130 (Low Lift) **138 (High Lif		45 (Down) *129 (I ow Lift) h Lift)

Joins page 15

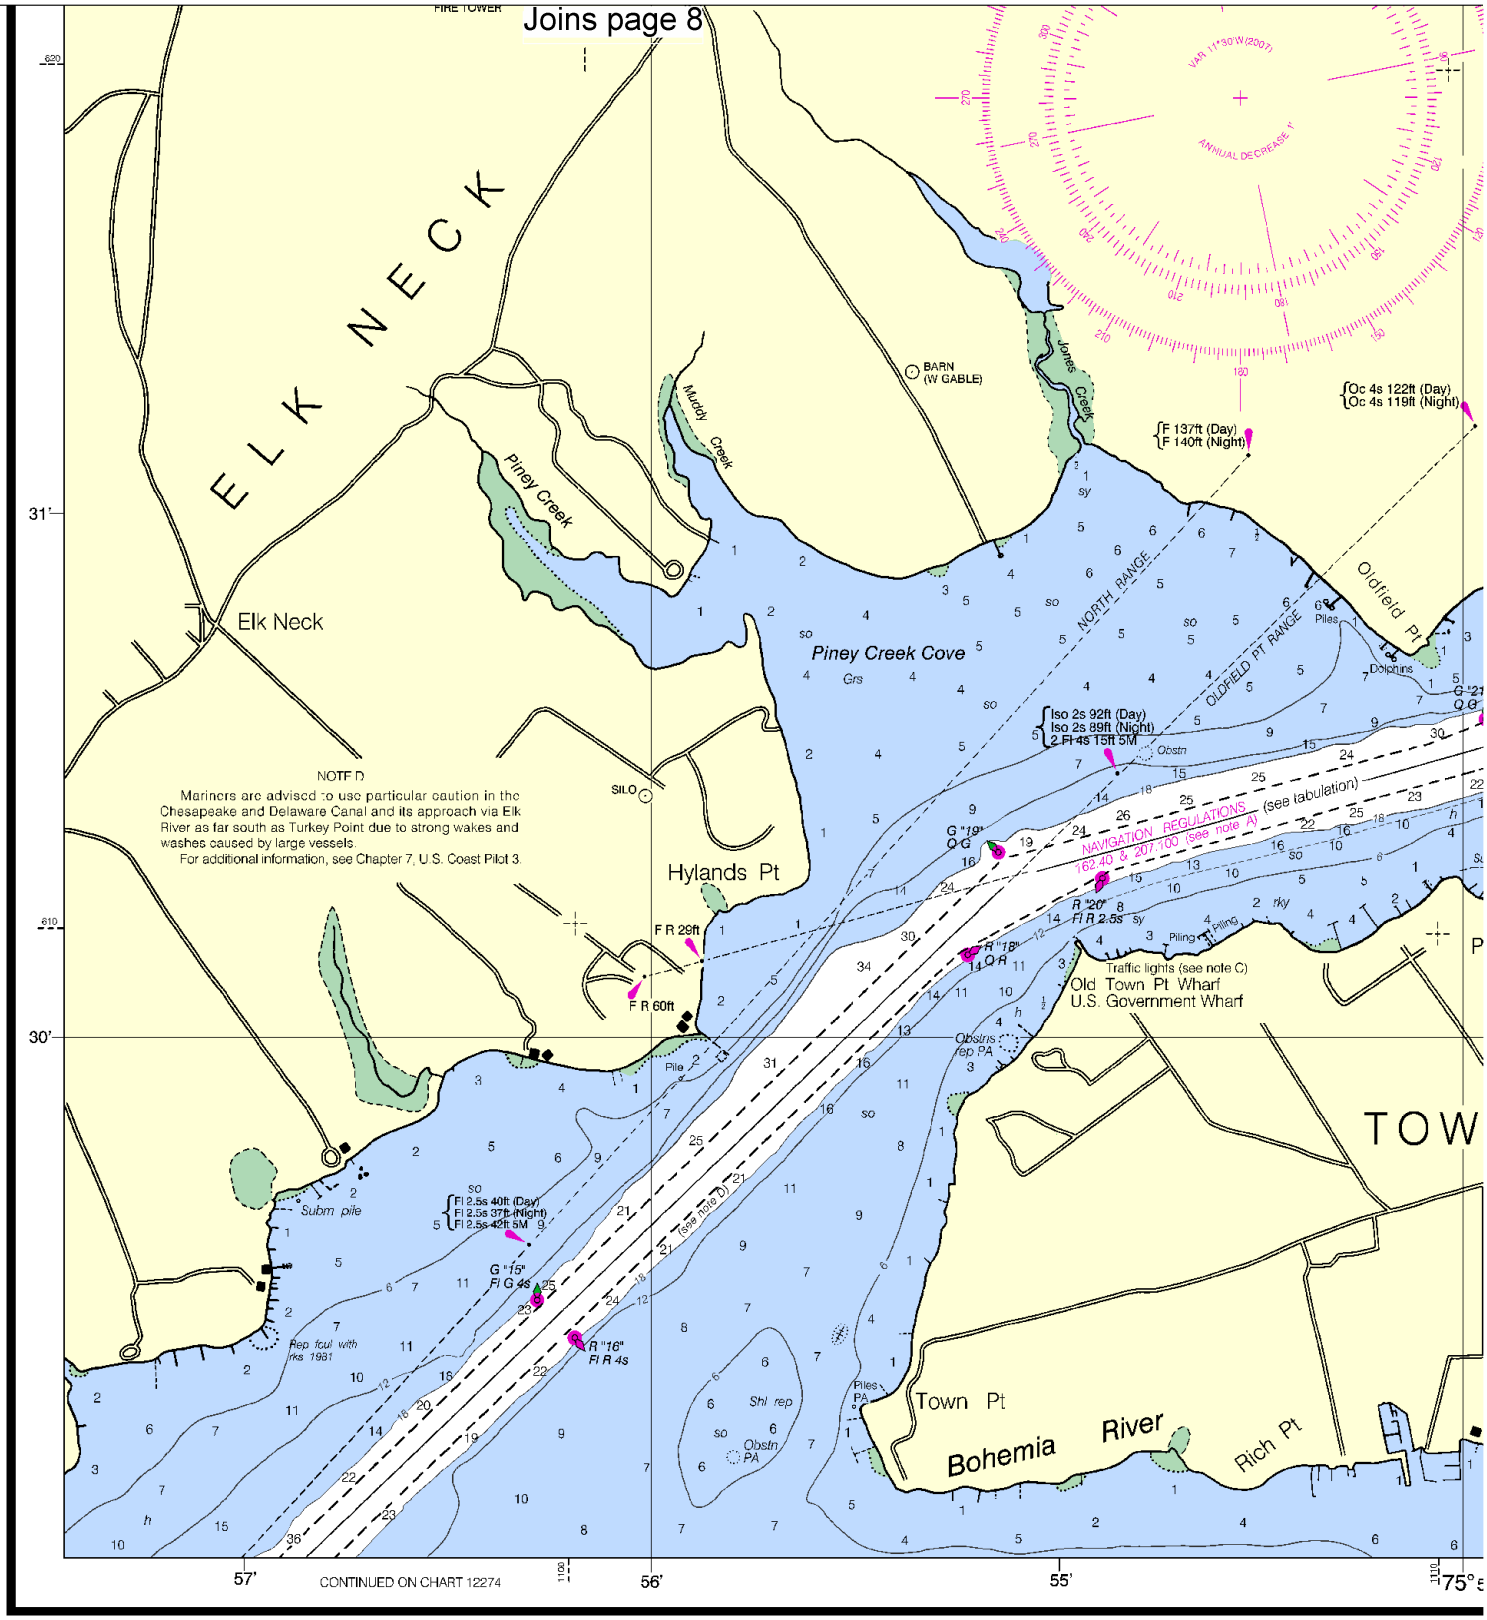

34th Ed., Sep. / 07 ■
Corrected through NM Sep. 01/07
Corrected through LNM Aug. 28/07

12277

CAUTION
This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.

SOUNDINGS IN FE

12

North

Printed at reduced scale. ~~SCALE 1:20,000~~ See Note on page 5.

Nautical Miles
0 1 1½

Yards
500 0 500 1000 1500 2000 2500

Joins page 9

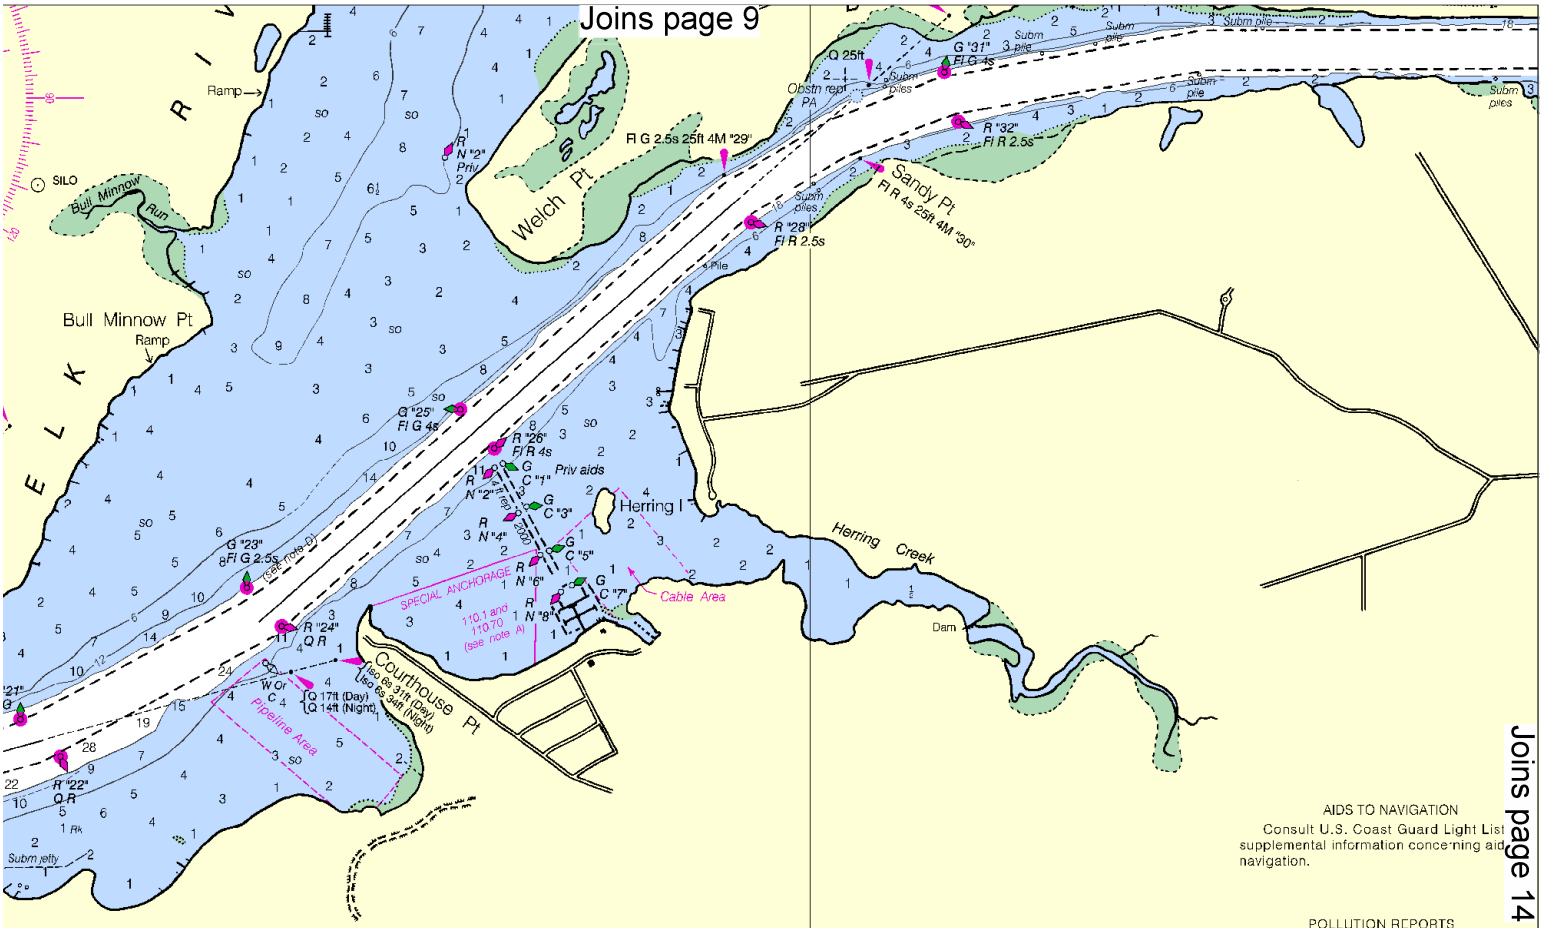

Joins page 14

AIDS TO NAVIGATION

Consult U.S. Coast Guard Light List supplemental information concerning aid navigation.

POLLUTION REPORTS

Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

N POINT NECK

Town Point

LOCAL MAGNETIC DISTURBANCE

Differences of as much as 6° from the normal variation have been observed in Elk River Channel from Old Town Point to Courthouse Point.

ABBREVIATIONS (For complete list of Symbols and Abbreviations, see Chart No. 1.)

Aids to Navigation (lights are white unless otherwise indicated):

AERO aeronautical	G green	Mo morse code	R TR radio tower
Al alternating	IQ interrupted quick	N nun	Rot rotating
B black	Iso isophase	OBSC obscured	s seconds
Bn beacon	LT HO lighthouse	Oc occulting	SEC sector
C can	M nautical mile	Or orange	St M statute miles
DIA diaphone	m minutes	Q quick	VQ very quick
F fixed	MICRO TR microwave tower	R red	W white
Fl flashing	Mkr marker	Ra Ref radar reflector	WHIS whistle
		R Bn radiobeacon	Y yellow

Bottom characteristics:

Blds boulders	Co coral	gy gray	Oys oysters	so soft
bk broken	G gravel	h hard	Rk rock	Sh shells
Cy clay	Grs grass	M mud	S sand	sy sticky

Miscellaneous:

AUTH authorized	Obstn obstruction	PD position doubtful	Subm submerged
ED existence doubtful	PA position approximate	Rep reported	

(21) Wreck, rock, obstruction, or shoal swept clear to the depth indicated.

(2) Rocks that cover and uncover, with heights in feet above datum of soundings.

CAUTION

Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

During some winter months or when endangered by ice, certain aids to navigation are replaced by other types or removed. For details see U.S. Coast Guard Light List.

5.0.0

1

To find SPEED, right point on 60

54' 53' 52' 51'

ET

This nautical chart has been designed to promote safe navigation. The National Ocean Service encourages users to submit corrections, additions, or comments for improving this chart to the Chief, Marine Chart Division (N/CS2), National Ocean Service, NOAA, Silver Spring, Maryland 20910-3282.

Published at Was
U.S. DEPARTMENT
NATIONAL OCEANIC AND ATMO
NATIONAL OCE
COAST SU

Joins page 10

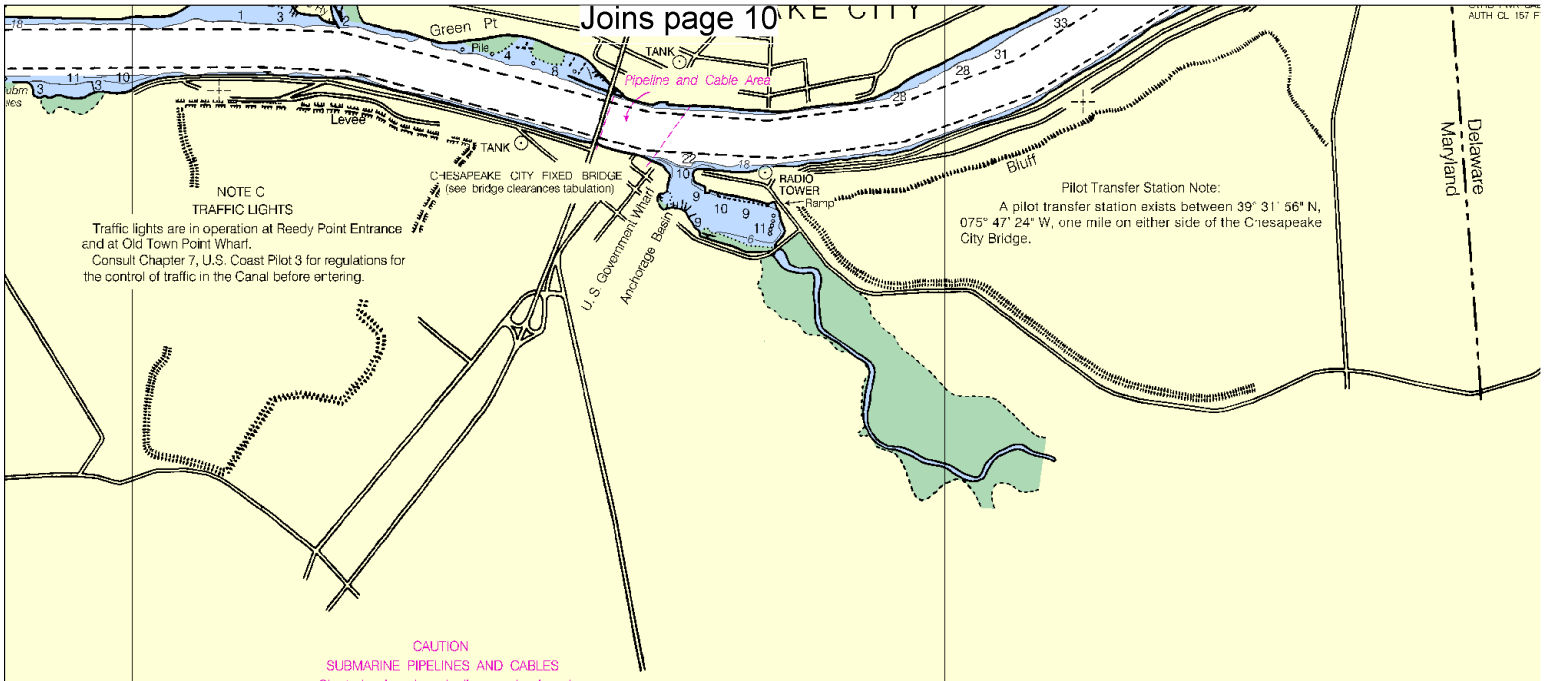

NOTE C
TRAFFIC LIGHTS

Traffic lights are in operation at Reedy Point Entrance and at Old Town Point Wharf.
Consult Chapter 7, U.S. Coast Pilot 3 for regulations for the control of traffic in the Canal before entering.

Pilot Transfer Station Note:
A pilot transfer station exists between 39° 31' 56" N, 075° 47' 24" W, one mile on either side of the Chesapeake City Bridge.

CAUTION
SUBMARINE PIPELINES AND CABLES

Charted submarine pipelines and submarine cables and submarine pipeline and cable areas are shown as:

Pipeline Area — Cable Area

Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging, or trawling.
Covered wells may be marked by lighted or unlighted buoys.

Joins page 13

PLANE COORDINATE GRID
(based on NAD 1927)
The Maryland State Grid is indicated on this chart at 10,000 foot intervals thus: ⊣+⊢
The last three digits are omitted.

CAUTION
Improved channels shown by broken lines are subject to shoaling, particularly at the edges.

SCALE 1:20,000
Nautical Miles
0 ½ 1 1½
Yards
0 500 1000 1500 2000 2500

LOGARITHMIC SPEED SCALE
2 3 4 5 6 7 8 9 10 15 20 25 30 40 50 60

SPEED, place one point of dividers on distance run (in any unit) and the other on minutes run. Without changing divider spread, place it on 60 and left point will then indicate speed in units per hour. Example: with 4.0 nautical miles run in 15 minutes, the speed is 16.0 knots.

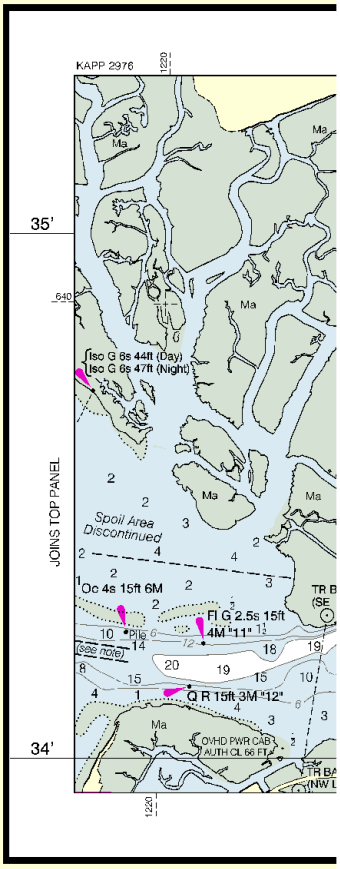

50' 50" 40" 30" 20" 10" 49' 50" 48' 47'

t Washington, D.C.
ENT OF COMMERCE
ATMOSPHERIC ADMINISTRATION
OCEAN SERVICE
ST SURVEY

PRINT-ON-DEMAND CHARTS

NOAA and its partner, OceanGrafix, offer this chart updated weekly by NOAA for Notices to Mariners and critical corrections. Charts are printed when ordered us ng Print-on-Demand technology. New Editions are available 5-8 weeks before their release as traditional NOAA charts. Ask your chart agent about Print-on-Demand charts or contact NOAA at 1-800-584-4683. http://NauticalCharts.gov, help@NauticalCharts.gov, or OceanGrafix at 1-877-56CHART, http://OceanGrafix.com, or help@OceanGrafix.com.

FATHOMS	
FEET	
METERS	1

North

Printed at reduced scale. ~~SCALE 1:20,000~~ See Note on page 5.

Nautical Miles
0 1 1½
Yards
500 0 500 1000 1500 2000 2500

Joins page 11

CHESAPEAKE AND DELAWARE CANAL BRIDGE CLEARANCES

VERTICAL CLEARANCES ARE EXPRESSED IN FEET ABOVE MEAN HIGH WATER (MHW)

	225 feet South of C/L	150 feet South of C/L	Center ine of Canal	150 feet North of C/L	225 feet North of C/L
REEDY PT BRIDGE	134 (133)	135	136	135	134 (133)
ST GEORGES BRIDGE E	132	134	137	134	132
ST GEORGES BRIDGE W			142		
CONRAIL LIFT BRIDGE	45 (Down) *129 (Low Lift) **137 (High Lift)		45 (Down) *130 (Low Lift) **138 (High Lift)		45 (Down) *129 (Low Lift) **137 (High Lift)
PIPELINE CROSSING	141	141	141	141	141
SUMMIT BRIDGE	135 (132)	137	138	137	135 (131)
CHESAPEAKE CITY BRIDGE	136 (135)	138	140	138	136 (134)

Notes: 136- -Clearances below lowest steel girder of bridge.
(134)-Clearances below navigation lights.
*Normal low limit stop for raised position of Conrail Lift Bridge.
**The Conrail Lift Bridge limit override allows an additional 8 feet of clearance. (indicated by alignment of white lines)

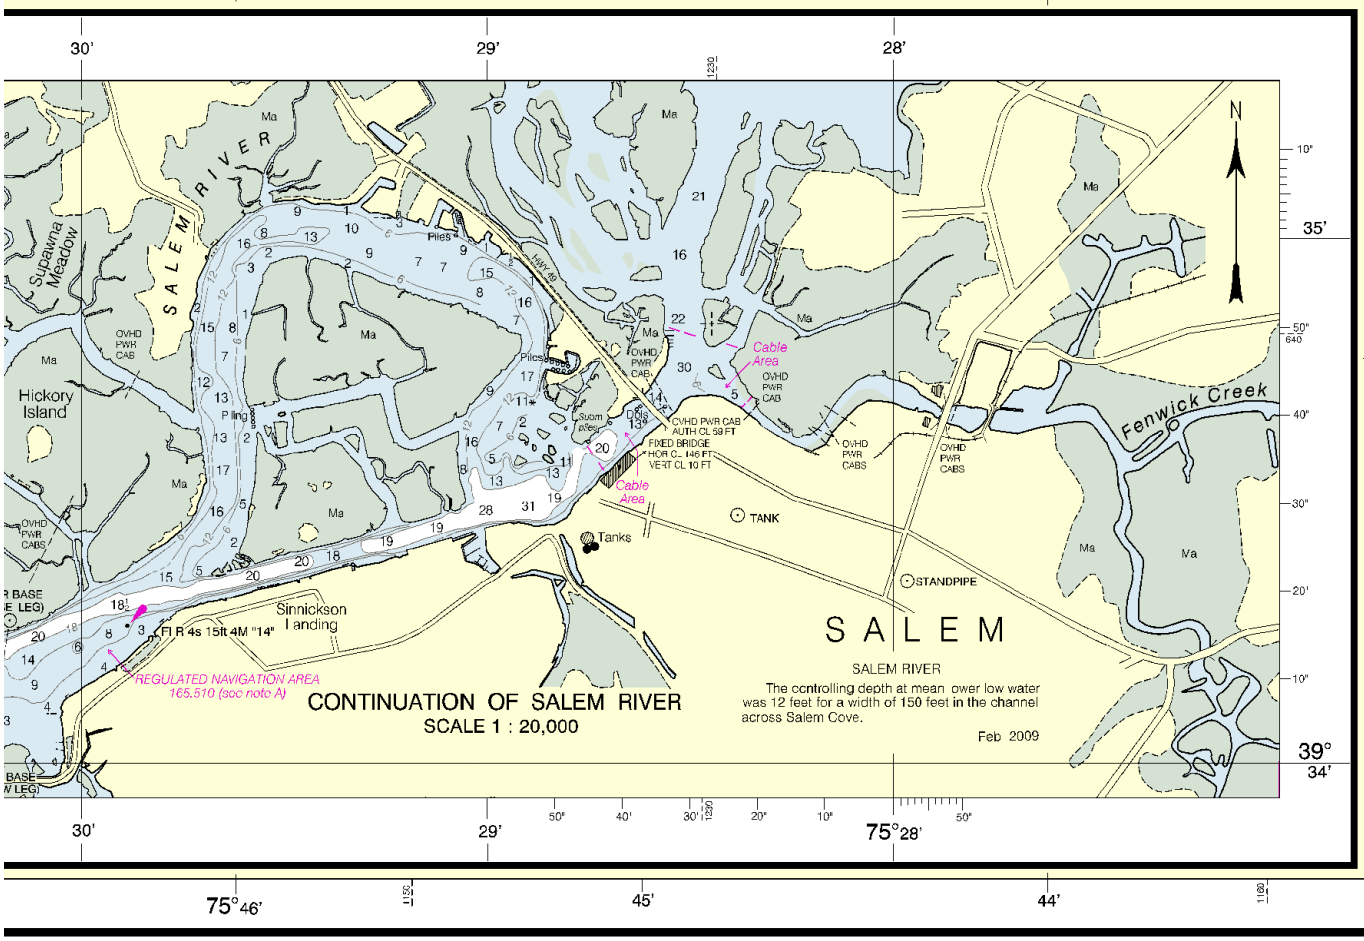

Chesapeake and Delaware Canal

SOUNDINGS IN FEET - SCALE 1:20,000

12277

ED NO. 34
NSN 7642014010328 NGA REFERENCE NO. 12AHA12277

EMERGENCY INFORMATION

VHF Marine Radio channels for use on the waterways:

Channel 6 – Intership safety communications.
Channel 9 – Communications between boats and ship-to-coast.
Channel 13 – Navigation purposes at bridges, locks, harbors.
Channel 16 – Emergency, distress and safety calls to Coast Guard and others, and to initiate calls to other vessels. Contact the other vessel, agree to another channel, and then switch.
Channel 22 – Calls between the Coast Guard and the public. Severe weather warnings, hazards to navigation and safety warnings are broadcast here.
Channels 68, 69, 71, 72 & 78 – Recreational boat channels.

Distress Call Procedures

1. Make sure radio is on.
2. Select Channel 16.
3. Press/Hold the transmit button.
4. Clearly say: "MAYDAY, MAYDAY, MAYDAY."
5. Also give: Vessel Name and/or Description; Position and/or Location; Nature of Emergency; Number of People on Board.
6. Release transmit button.
7. Wait for 10 seconds – If no response Repeat MAYDAY Call.

HAVE ALL PERSONS PUT ON LIFE JACKETS !!

Mobile Phones – Call 911 for water rescue.
Coast Guard Search & Rescue – 800-418-7314/410-576-2525
Coast Guard Stillpond – 410-778-2201-2202
Maryland Natural Resources Police – 410-260-8888
Delaware Marine Police – 302-736-4580

NOAA Weather Radio – 162.400 MHz, 162.425 MHz, 162.450 MHz, 162.475 MHz, 162.500 MHz, 162.525 MHz, 162.550 MHz.

Getting and Giving Help – Signal other boaters using visual distress signals (flares, orange flag, lights, arm signals); whistles; horns; and on your VHF radio. You are required by law to help boaters in trouble. Respond to distress signals, but do not endanger yourself.

.

NOAA CHARTING PUBLICATIONS

Official NOAA Nautical Charts – NOAA surveys and charts the national and territorial waters of the U.S, including the Great Lakes, producing over 1,000 traditional nautical charts covering 3.4 million square nautical miles. Carriage of official NOAA charts is mandatory on the commercial ships that carry our commerce. They are used on every Navy and Coast Guard ship, fishing and passenger vessels, and are widely carried by recreational boaters. NOAA charts are available from official chart agents listed at: www.NauticalCharts.NOAA.gov.

Official Electronic Navigational Charts® (ENCs) – ENCs are digital files of each chart's features and their attributes for use in computer-based navigation systems. ENCs comply with standards of the International Hydrographic Organization. ENCs and their updates are available for free from NOAA at: www.NauticalCharts.NOAA.gov.

Official Raster Navigational Charts (RNCs) – RNCs are georeferenced digital pictures of NOAA's charts that are suitable for use in computer-based navigation systems. RNCs comply with standards of the International Hydrographic Organization. RNCs and their updates are available for free from NOAA at: www.NauticalCharts.NOAA.gov.

Official BookletCharts™ - BookletCharts™ are reduced scale NOAA charts printed in page-sized pieces. The "home edition" can be downloaded from NOAA for free and printed. The "professional edition", containing additional boating, safety, and educational edition is available for NOAA chart agents or over the Internet.

Official PocketCharts™ – PocketCharts™ are for beginning recreational boaters to use for planning and locating, but not for real navigation. Measuring a convenient 13" by 19", they have a 1/3 scale chart on one side, and safety, boating, and educational information on the reverse. They can be purchased at retail outlets and on the Internet.

Official U.S. Coast Pilot® – The Coast Pilots are 9 text volumes containing information important to navigators such as channel descriptions, port facilities, anchorages, bridge and cable clearances, currents, prominent features, weather, dangers, and Federal Regulations. They supplement the charts and are available from official NOAA chart agents or downloaded for free at: www.NauticalCharts.NOAA.gov.

Official Print-on-Demand Nautical Charts – These full-scale NOAA charts are updated each week by NOAA for all Notice to Mariner corrections. They have additional information added in the margin to supplement the chart. Print on Demand charts meet all federal chart carriage regulations for charts and updating. Produced under a public/private partnership between NOAA and OceanGrafix, LLC, suppliers of these premium charts are listed at www.OceanGrafix.com.

Official Chart No. 1, Nautical Chart Symbols – This reference publication depicts basic chart elements and explains nautical chart symbols and abbreviations. Download it for free at: www.NauticalCharts.NOAA.gov.

Coast Survey Navigation Managers – These ambassadors to the maritime community maintain a regional presence for NOAA and help identify the challenges facing marine transportation and boating. They are listed at http://nauticalcharts.noaa.gov/nsd/reps.htm.

Internet sites: www.NauticalCharts.NOAA.gov, www.NOAA.gov, www.TidesandCurrents.NOAA.gov, www.NOS.NOAA.gov.

NOAA, the Nation's Chartmaker